



SOUND TRANSMISSION LOSS TEST REPORT NO. TL09-580

CLIENT: DMFCWBS, LLC
9100 Centre Pointe Drive, Suite 210
West Chester, OH 45069

Page 1 of 2
8 October 2009

TEST DATE: 22 September 2009

INTRODUCTION

The methods and procedures used for this test conform to the provisions and requirements of ASTM E 90-04, Standard Test Method for Laboratory Measurement of Airborne Sound Transmission Loss of Building Partitions. Copies of the test standard are available at www.astm.org. The test chamber source and receiving room volumes are 204 and 148.4 cubic meters respectively. Western Electro-Acoustic Laboratory is accredited by NVLAP (National Voluntary Laboratory Accreditation Program) Lab Code 100256-0 for this test procedure. NVLAP is part of the United States Department of Commerce, National Institute of Standards and Technology (NIST). This test report relates only to the item(s) tested. Any advertising that utilizes this test report or test data must not imply product certification or endorsement by WEAL, NVLAP, NIST or the U.S. Government.

DESCRIPTION OF TEST SPECIMEN

The test specimen was a wall assembly constructed from metal studs, resilient channel, and type X gypsum board. The studs and tracks were ProSTUD-015 (25 GA equivalent) 2-1/2 inch (64 mm) metal. The studs were spaced horizontally at 24 inches (610 mm) O.C. The frame was isolated from the test opening with 1/4 inch (6.4 mm) neoprene pads. 3-1/2 inch (89 mm) thick, 23 inch (584 mm) wide R-13 unfaced fiberglass batts were installed in the stud cavities. On the receiving room side, Dietrich RCSD single leg resilient channels were screwed to the studs horizontally at 24 inches (610 mm) O.C. The center of the top channel was 2 inches (50.8 mm) below the top of the wall and the center of the bottom channel was 2 inches (50.8 mm) above the bottom of the wall. The top four channels were oriented with the resilient leg above the attachment flange and the bottom channel was oriented with the resilient leg below the attachment flange. Two layers of 5/8 inch (15.9 mm) thick type X gypsum board were screwed to the channels at 12 inches (305 mm) O.C. The first layer used 1 inch (25.4 mm) #6 drywall screws and the second layer used 1-5/8 inch (41.3 mm) #6 drywall screws. On the source room side, two layers of 5/8 inch (15.9 mm) thick type X gypsum board were screwed to the studs at 16 inches (406 mm) O.C. around the perimeter and in the field. The first layer used 1-1/4 inch (31.8 mm) #6 drywall screws and the second layer used 1-5/8 inch (41.3 mm) #6 drywall screws. All gypsum board was oriented vertically and joints were staggered on opposite sides of the wall and between layers. All joints and perimeters were sealed with a bead of caulking and metal foil tape. Screw heads were covered with metal foil tape. The overall dimensions of the wall assembly were 96 inches (2.44 m) wide by 96 inches (2.44 m) high by 5-1/2 inches (140 mm) thick. The overall weight of the assembly was estimated to be 614 lbs (279 kg) for a calculated surface density of 9.59 lbs./ft² (46.8 kg/m²).

RESULTS OF THE MEASUREMENTS

One-third octave band sound transmission loss values are plotted and tabulated on the attached sheet. ASTM minimum volume requirements are met at 80 Hz and above. The Sound Transmission Class rating determined in accordance with ASTM E 413-04 was STC-62.

Approved:

Gary E. Marge
Laboratory Director

Respectfully submitted,
Western Electro-Acoustic Laboratory


Raul Martinez
Acoustical Test Technician

Report must be distributed in its entirety except with written authorization from Western Electro-Acoustic Laboratory



WESTERN ELECTRO-ACOUSTIC LABORATORY

Report No. TL09-580

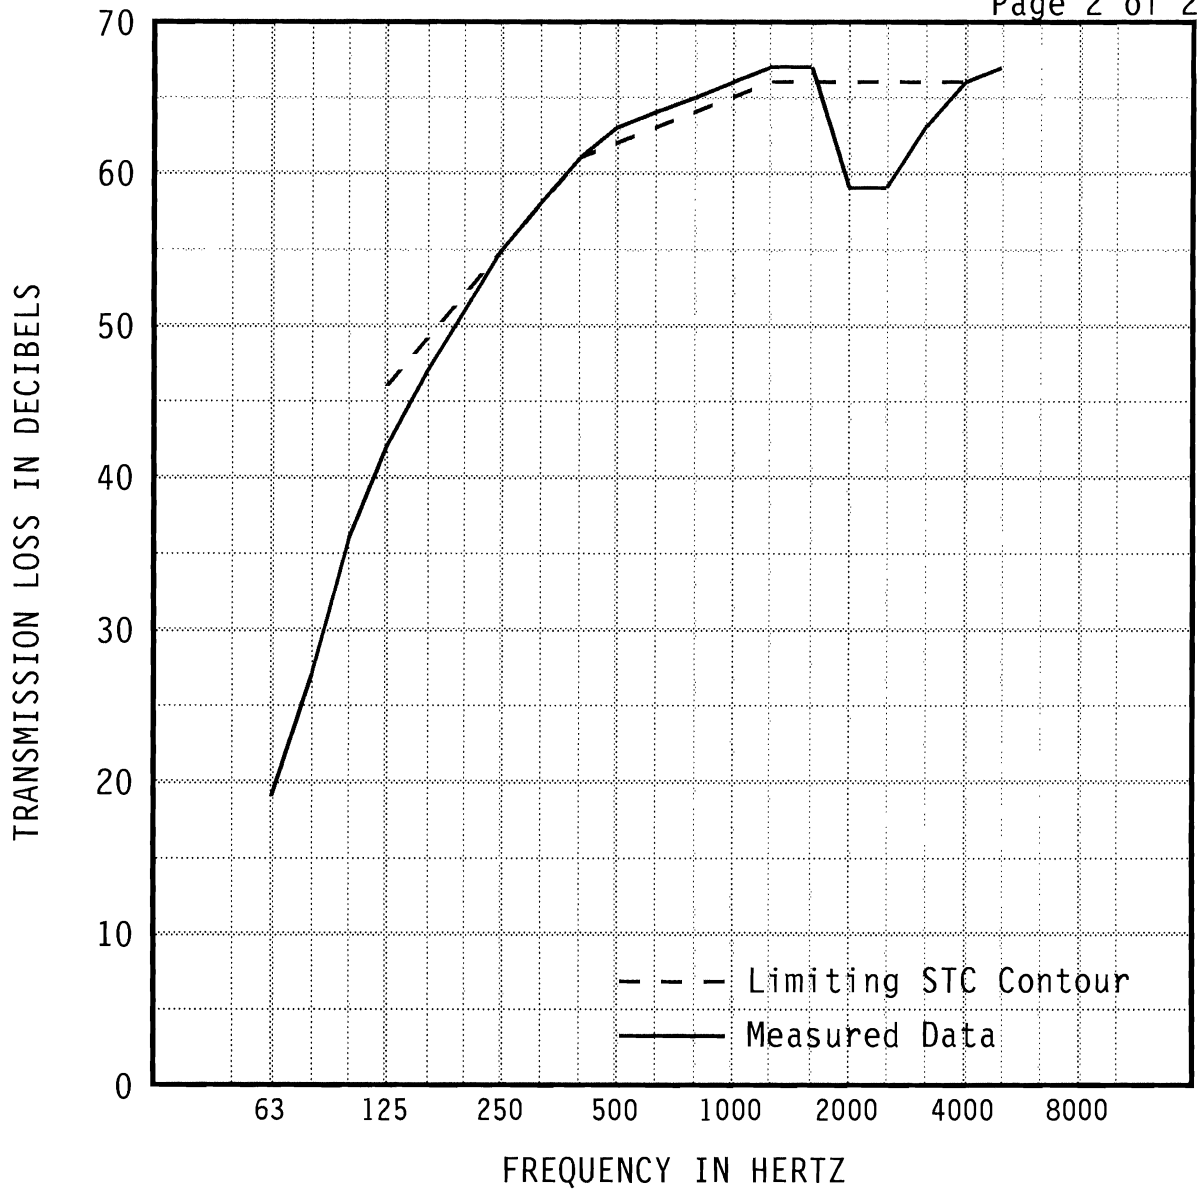

1/3 OCT BND CNTR	FREQ	63	80	100	125	160	200	250	315	400	500
TL in dB		19	27	36	42	47	*51	*55	*58	*61	*63
95% Confidence in dB deficiencies		1.42	1.92	2.07	1.47	0.89	0.76	0.80	0.52	0.36	0.38
					(4)	(2)	(1)	(0)	(0)	(0)	
1/3 OCT BND CNTR	FREQ	630	800	1000	1250	1600	2000	2500	3150	4000	5000
TL in dB		*64	*65	66	67	67	59	59	63	66	67
95% Confidence in dB deficiencies		0.29	0.44	0.38	0.39	0.36	0.56	0.55	0.31	0.32	0.50
							(7)	(7)	(3)	(0)	

EWR	OITC	* Minimum estimate of transmission loss. Measurement limited by filler wall. Actual TL will be equal to or greater than value reported.	Specimen Area: 64 sq.ft. Temperature: 76.1 deg. F Relative Humidity: 31 % Test Date: 22 September 2009	STC
63	45			62 (24)

Report must be distributed in its entirety except with written authorization from Western Electro-Acoustic Laboratory

