


TRAKLOC® FIXED LENGTH STUD (TLF)

TRAKLOC stud without telescopic extension. Studs are fixed length and not adjustable and have a TRAKLOC swaged end on both ends of the stud allowing the stud to be connected to the top and bottom track without fasteners.

- Connected without the use of fasteners
- Ideal for partition walls that do not go from deck to deck and non-composite "above-grid" wall assemblies that have suspended ceilings, as well as TI (tenant improvement) and remodel applications
- Less time on lifts/ladders

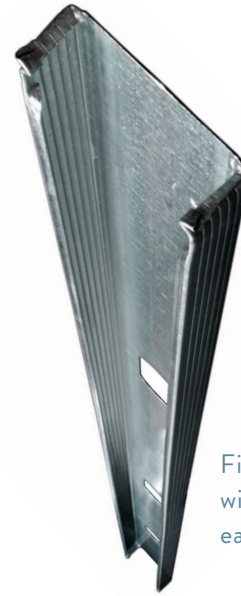


Fixed Length Stud
with swages on
each end

TRAKLOC® DEFLECTION STUD (TLD)

The TRAKLOC deflection stud has a 12" long extension insert with slots cut out of the flanges. This allows the drywall screw to pass through the drywall and the outer portion of the stud while passing through the slot. The slot allows the drywall to be attached while still allowing for seismic and/or live-load induced inter-floor deflection at the head-of-wall joint.

- Allows for seismic and live-load vertical inter-floor deflection
- Tested in accordance with ASTM E-119 and ASTM E-1966
- Approved for use in one-hour and two-hour fire-rated head-of-wall deflection assemblies
- Intertek Warnock Hersey Design Listed
- TRAKLOC® Deflection Stud (TLD) has a total allowable vertical (deflection) movement of 3" (1-1/2"±)
- Allows up to 2" of stud height adjustability

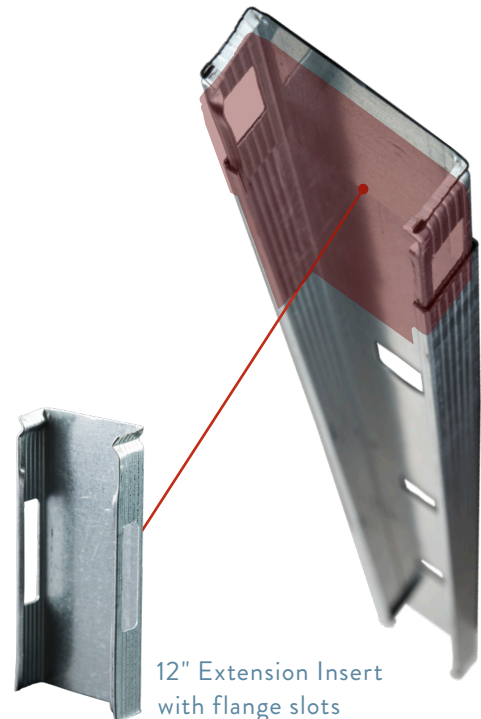

12" Extension Insert
with flange slots