

# CLARKDIETRICH BUILDING SYSTEMS, LLC ACOUSTICAL PERFORMANCE TEST REPORT

# SCOPE OF WORK

ASTM E90 AND ASTM E492 TESTING ON CERAMIC TILE ON NOBLESEAL CIS

#### **SPECIMEN TYPE**

Open Web Truss - 406 mm (16") - ClarkDietrich<sup>®</sup> Sound Clip - One-Layer USG SHEETROCK<sup>®</sup> Brand FIRECODE<sup>®</sup> C Core

# **REPORT NUMBER**

J4777.06-113-11-R1

# **TEST DATE** 03/11/19

 ISSUE DATE
 REVISED DATE


 04/15/19
 05/20/19

**RECORD RETENTION END** 03/11/23

# PAGES

12

DOCUMENT CONTROL ATI 00629 (03/21/18) RTTDS-R-AMER-Test-2844 © 2017 INTERTEK

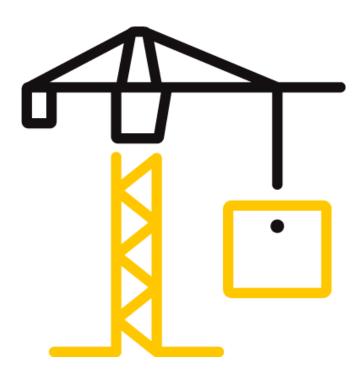



130 Derry Court York, PA 17406

Telephone: 717-764-7700 Facsimile: 717-764-4129 www.intertek.com/building

#### TEST REPORT FOR CLARKDIETRICH BUILDING SYSTEMS, LLC

Report No.: J4777.06-113-11-R1 Date: 05/20/19

#### **REPORT ISSUED TO**

**CLARKDIETRICH BUILDING SYSTEMS, LLC** 9100 Centre Pointe Drive, Suite 210 West Chester, Ohio 45069

#### **SECTION 1**

SCOPE

Intertek Building & Construction (B&C) was contracted by ClarkDietrich Building Systems, LLC to perform testing in accordance with ASTM E90 AND ASTM E492 on Ceramic Tile on Nobleseal CIS. Results obtained are tested values and were secured by using the designated test method(s). Testing was conducted in the VT test chambers at Intertek B&C located in York, Pennsylvania.

This report does not constitute certification of this product nor an opinion or endorsement by this laboratory.

#### **SECTION 2**

#### SUMMARY OF TEST RESULTS

DATA FILE NO.	J4777.06
SERIES/MODEL:	Ceramic Tile on Nobleseal CIS
STC	59
IIC	53

COMPLETED BY:	Cody R. Snyder	COMPLETED BY:	Jordan Strybos
	Technician - Acoustical		Engineer, Team Lead -
TITLE:	Testing	TITLE:	Acoustical Testing
SIGNATURE:		SIGNATURE:	
DATE:	05/20/19	DATE:	05/20/19

This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of ACCREDITED the tested material, product or service must first be approved in writing by Intertek. The observations and test Testing Laborator results in this report are relevant only to the sample(s) tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.





#### TEST REPORT FOR CLARKDIETRICH BUILDING SYSTEMS, LLC

Report No.: J4777.06-113-11-R1 Date: 05/20/19

### SECTION 3 TEST METHODS

The specimen was evaluated in accordance with the following:

**ASTM E90-09 (2016)**, Standard Test Method for Laboratory Measurement of Airborne Sound Transmission Loss of Building Partitions

ASTM E413-16, Classification for Rating Sound Insulation

**ASTM E492-09(2016)e1**, Standard Test Method for Laboratory Measurement of Impact Sound Transmission Through Floor-Ceiling Assemblies Using the Tapping Machine

ASTM E989-18, Classification for Determination of Impact Insulation Class (IIC)

**ASTM E2235-04 (2012)**, Standard Test Method for Determination of Decay Rates for Use in Sound Insulation Test Methods

#### **SECTION 4**

#### MATERIAL SOURCE/INSTALLATION

The full test specimen was assembled on the day of testing by B&C. All materials provided by the client were installed on an existing B&C assembly (Open Web Truss - 406 mm (16") - ClarkDietrich<sup>®</sup> Sound Clip - One-Layer USG SHEETROCK<sup>®</sup> Brand FIRECODE<sup>®</sup> C Core) utilizing B&C-supplied materials. The assembly was installed in a steel test frame which was installed into the opening between the source and receive rooms in the test chamber. The test frame was isolated from the structure with dense neoprene gasket.

The total weight of the floor/ceiling assembly was 1168.1 kg / 2574.3 lbs. B&C will store samples of the test specimen for four years. Photographs of the test specimen are included in the report. The client did not supply drawings of the test specimen.

B&C will service this report for the entire test record retention period. Test records, such as detailed drawings, datasheets, representative samples of test specimens, or other pertinent project documentation, will be retained by B&C for the entire test record retention period.



# TEST REPORT FOR CLARKDIETRICH BUILDING SYSTEMS, LLC

Report No.: J4777.06-113-11-R1 Date: 05/20/19

#### **SECTION 5**

#### EQUIPMENT

INSTRUMENT	MANUFACTURER	MODEL	DESCRIPTION	ASSET #	CAL DAT	E
Data Acquisition Unit	National Instruments	PXI-4462	Data Acquisition Card	INT00977	08/18	*
Data Acquisition Unit	National Instruments	PXI-4462	Data Acquisition Card	65124	05/18	*
Data Acquisition Unit	National Instruments	PXI-4462	Data Acquisition Card	63763-1	06/18	*
Microphone Calibrator	Norsonic	Nor1251	Acoustical Calibrator	65105	06/18	
Receive Room Microphone	PCB Piezotronics	378C20	Microphone and Preamplifier	65617	06/18	
Receive Room Microphone	PCB Piezotronics	378B20	Microphone and Preamplifier	64340	09/18	
Receive Room Microphone	PCB Piezotronics	378B20	Microphone and Preamplifier	63745	06/18	
Receive Room Microphone	PCB Piezotronics	378B20	Microphone and Preamplifier	63746	09/18	
Receive Room Microphone	PCB Piezotronics	378B20	Microphone and Preamplifier	63747	07/18	
Receive Room Environmental	Comet	T7510	Temperature and Humidity	63810	10/18	
Indicator	comet	17510	Transmitter	63811	10/18	
Source Room Microphone	PCB Piezotronics	378C20	Microphone and Preamplifier	63744	04/18	
Source Room Microphone	PCB Piezotronics	378C20	Microphone and Preamplifier	63739	04/18	
Source Room Microphone	PCB Piezotronics	378C20	Microphone and Preamplifier	63740	04/18	
Source Room Microphone	PCB Piezotronics	378C20	Microphone and Preamplifier	INT00653	01/19	
Source Room Microphone	PCB Electronics	378C20	Microphone and Preamplifier	63741	04/18	
Source Room Environmental Indicator	Comet	T7510	Temperature and Humidity Transmitter	63812	10/18	
Tapping Machine	Norsonic	Nor277	Tapping Machine	INT00936	12/18	

\* The calibration frequency for this equipment is every two years per the manufacturer's recommendation.

VT RECEIVE ROOM VOLUME	156.28 m³ (5519.06 ft³)
VT SOURCE ROOM VOLUME	190 m³ (6709.79 ft³)

#### **SECTION 6**

LIST OF OFFICIAL OBSERVERS

NAME	COMPANY
Michael K. Daniel	Intertek B&C
Jordan Strybos	Intertek B&C



#### TEST REPORT FOR CLARKDIETRICH BUILDING SYSTEMS, LLC

Report No.: J4777.06-113-11-R1 Date: 05/20/19

#### SECTION 7 TEST PROCEDURE

The microphones were calibrated before conducting the tests. The air temperature and relative humidity conditions were monitored and recorded during all measurements. The average temperature and humidity of both the source and received rooms are listed in Sections 10 and 11. The maximum and minimum temperatures and humidities of the receive room from the duration of the test are listed in Sections 12 and 13.

The airborne transmission loss test was conducted in accordance with the ASTM E90 test method using the single direction method. Two background noise sound pressure level and five sound absorption measurements were conducted at each of five microphone positions. Two sound pressure level measurements were made simultaneously in both rooms, at each of five microphone positions.

The impact sound transmission test was conducted in accordance with the ASTM E492 test method. Two background noise sound pressure level, two sound pressure level measurements with the tapping machine operating at each position specified by ASTM E492, and five sound absorption measurements were conducted at each of five microphone positions.

Detailed test procedures, data for flanking limit tests, repeatability measurements, and reference specimen tests are available upon request.

#### SECTION 8 TEST CALCULATIONS

The STC (Sound Transmission Class) and IIC (Impact Insulation Class) ratings were calculated in accordance with ASTM E413 and ASTM E989, respectively.



# TEST REPORT FOR CLARKDIETRICH BUILDING SYSTEMS, LLC

Report No.: J4777.06-113-11-R1 Date: 05/20/19

#### **SECTION 9**

# **TEST SPECIMEN DESCRIPTION**

MATERIAL	Dimensions	Thickness	MANUFACTURER AND	QUANTITY	AVERAGE				
	(mm/inch)	(mm/inch)	SERIES	QUANTIT	WEIGHT				
	304.8 by 304.8 12 by 12	8 / 0.31	Daltile®	10.98 m² 118.19 ft²	15.87 kg/m <sup>2</sup> 3.25 lb/ft <sup>2</sup>				
Ceramic Tile	tile and wiped cle The mortar was s	Note: Laticrete Permacolor grout was placed into the 6.35 mm (0.25") joints between the ceramic tile and wiped clean. The ceramic tile was placed onto a bed of Laticrete Platinum 254 mortar. The mortar was set using a 6.35 mm by 6.35 mm (1/4" by 1/4") trowel. Both the grout and mortar were allowed to cure to manufacturer's specifications.							
	3023 by 1219.2 119 by 48	0.8 / 0.03	NobleSeal <sup>®</sup> CIS	10.98 m <sup>2</sup> 118.19 ft <sup>2</sup>	0.9 kg/m² 0.18 lb/ft²				
Sound Reduction Membrane	spray adhesive. T which was spreac Adhesive was allo	he underlayment v I using a 1.59 mm owed to cure per m	plastic was adhered to the so was adhered to the sheeting by 1.59 mm by 1.59 mm (1/1 nanufacturer's specifications.	with NobleBond 2 6" by 1/16" by 1/	1 adhesive, 16") trowel.				
Floor	3022.6 by 3632.2 119 by 143		USG Levelrock <sup>®</sup> Brand 2500	118.19 ft²	49.8 kg/m² 10.2 lb/ft²				
Underlayment		Note: Poured directly onto the subfloor underlayment, cured a minimum of 14 days. The gypsum panel had a closed cell foam perimeter isolation. No noticeable shrinkage or cracking was visible on the specimen.							
Sound Attenuation Mat	3023 by 1003.3 119 by 39.5	6.4 / 0.25	USG Levelrock <sup>®</sup> Brand SAM· N25™	10.98 m² 118.19 ft²	0.49 kg/m² 0.1 lb/ft²				
	Note: Loose laid with seams overlapping and taped								
Oriented Strand	1219 by 2438 48 by 96	18.8 / 0.74	N/A	10.98 m <sup>2</sup> 118.19 ft <sup>2</sup>	13.82 kg/m <sup>2</sup> 2.83 lb/ft <sup>2</sup>				
Board Sheathing	Note: Fastened to trusses with 76 mm (3") by 3 mm (0.12") framing nails on 203 mm (8") centers along perimeter and 305 mm (12") centers in the field.								
Fiberglass	520.7 by 3023 20.5 by 119	88.9 / 3.5	Johns Manville Unfaced R- 13	10.98 m² 118.19 ft²	1.32 kg/m² 0.27 lb/ft²				
Insulation	Note: Installed into the cavities between the trusses, stapled flush to the subfloor.								
Open Web Truss	88.9 by 2933.7 3.5 by 115.5	406.4 / 16	York PB Truss L/360	7 trusses	16.93 kg/truss 37.32 lb/truss				
	Note: Installed or	n 610 mm (24") cei	nters using JUS414 hanger br	ackets.					
Resilient Sound	76.2 by 36.5 3 by 1.4	31.8 / 1.25	ClarkDietrich <sup>®</sup> Sound Clip	36 clips	0.06 kg/clip 0.14 lb/clip				
Isolation Clip	Note: Installed in	a 406 mm by 1219	9 mm (16" by 48") grid patter	rn.					
Furring/Hat	3657.6 by 76.2 144 by 3	22.3 / 0.88	ClarkDietrich® 087F125-18	29.1 lin m 95.47 lin ft	0.48 kg/m 0.32 lb/ft				
Channel			nters perpendicular to the tru	usses. The measur	ed thickness of				
	1219 by 3023 48 by 119	15.9 / 0.63	USG SHEETROCK <sup>®</sup> Brand FIRECODE <sup>®</sup> C Core	10.98 m <sup>2</sup> 118.19 ft <sup>2</sup>	11.9 kg/m <sup>2</sup> 2.44 lb/ft <sup>2</sup>				
Gypsum Panel	Note: Fastened to the channels on 203 mm (8")centers with 25.4 mm (1") Type S bugle head screws. The seams of the gypsum panels were sealed with Pecora AC-20 FTR caulk and covered with pressure sensitive tape.								



Telephone: 717-764-7700 Facsimile: 717-764-4129 www.intertek.com/building

# TEST REPORT FOR CLARKDIETRICH BUILDING SYSTEMS, LLC

Report No.: J4777.06-113-11-R1 Date: 05/20/19

#### **SECTION 10**

#### **TEST RESULTS - AIRBORNE SOUND TRANSMISSION LOSS**

TEST DATE DATA FILE NO. CLIENT		ilding Systems, LLC			ACCREDITED Testing Laboratory	
DESCRIPTION	8 mm (0.31") Daltile® Ceramic Tile, 0.8 mm (0.03") NobleSeal® CIS Sound Reduction Membrane, 25.4 mm (1") USG Levelrock® Brand 2500 Floor Underlayment, 6.4 mm (0.25") USG Levelrock® Brand SAM-N25™ Sound Attenuation Mat, 18.8 mm (0.74") Oriented Strand Board Sheathing, 88.9 mm (3.5") Johns Manville Unfaced R-13 Fiberglass Insulation, 406.4 mm (16") York PB Truss L/360 Open Web Truss, 31.75 mm (1.25") ClarkDietrich® Sound Clip Resilient Sound Isolation Clip, 22.3 mm (0.88") ClarkDietrich® 087F125-18 Furring/Hat Channel, 15.9 mm (0.63") USG SHEETROCK® Brand FIRECODE® C Core Gypsum Panel					
SPECIMEN AREA	10.98 m²	Receive Temp.	20.2°C (68.4°F)	Source Temp.	18.1°C (64.6°F)	
TECHNICIAN	MKD	Receive Humidity	56%	Source Humidity	56%	

	BACKGROUND		SOURCE	RECEIVE	SPECIMEN	95%	NUMBER
FREQ	SPL	ABSORPTION	SPL	SPL	TL	CONFIDENCE	OF
(Hz)	(dB)	m²	(dB)	(dB)	(dB)	LIMIT	DEFICIENCIES
50	37.3	29.1	100	63	34	2.7	-
63	36.4	26.5	100	61	36	3.3	-
80	32.4	16.7	108	65	43	2.5	-
100	27.6	12.9	106	68	38	2.4	-
125	26.2	10.8	104	65	40	1.6	3
160	23.4	9.5	105	62	44	1.0	2
200	20.4	9.8	102	56	47	1.7	2
250	14.8	10.1	100	54	47	0.6	5
315	17.2	9.6	103	53	52	0.9	3
400	12.5	8.1	102	50	54	1.0	4
500	15.6	7.5	103	50	54	0.6	5
630	17.6	7.5	103	49	56	0.7	4
800	18.8	7.6	103	45	60	0.6	1
1000	17.0	7.4	103	42	64	0.5	0
1250	12.5	7.4	103	40	66	0.4	0
1600	10.0	7.9	103	40	66	0.3	0
2000	11.3	8.7	102	40	65	0.5	0
2500	7.8	10.0	101	35	67	0.3	0
3150	6.8	11.0	102	33	70	0.6	0
4000	6.5	12.7	102	29	74	0.7	0
5000	6.9	14.7	102	26	76	0.6	-
6300	7.4	18.6	96	16	79	0.6	-
8000	8.1	24.0	95	12	81	1.0	-
10000	7.5	24.0	90	7	81	0.7	-
STC Rati	ng 59	(Sound Transm	ission Class)		Sum o	of Deficiencies	29

Notes:

1) Receive Room levels less than 5 dB above the Background levels are highlighted in yellow.

2) Specimen TL levels listed in red are potentially limited by the laboratory flanking limit.

*3)* Specimen TL levels listed in *blue* indicate the lower limit of the transmission loss.

4) Specimen TL levels listed in green indicate that there has been a filler wall correction applied




# TEST REPORT FOR CLARKDIETRICH BUILDING SYSTEMS, LLC

Report No.: J4777.06-113-11-R1 Date: 05/20/19

#### **SECTION 11**

#### **TEST RESULTS - AIRBORNE SOUND TRANSMISSION LOSS GRAPH**

TEST DATE	3/11/2019							
DATA FILE NO.	J4777.06	4///.06						
CLIENT	ClarkDietrich Bu	ClarkDietrich Building Systems, LLC						
DESCRIPTION	Brand 2500 Floor Under Oriented Strand Board S Truss L/360 Open Web	ClarkDietrich Building Systems, LLC         Testing Laboratory           8 mm (0.31") Daltile® Ceramic Tile, 0.8 mm (0.03") NobleSeal® CIS Sound Reduction Membrane, 25.4 mm (1") USG Levelrock®         Brand 2500 Floor Underlayment, 6.4 mm (0.25") USG Levelrock® Brand SAM-N25™ Sound Attenuation Mat, 18.8 mm (0.74")           Oriented Strand Board Sheathing, 88.9 mm (3.5") Johns Manville Unfaced R-13 Fiberglass Insulation, 406.4 mm (16") York PB         Truss L/360 Open Web Truss, 31.75 mm (1.25") ClarkDietrich® Sound Clip Resilient Sound Isolation Clip, 22.3 mm (0.88")           ClarkDietrich® 087F125-18 Furring/Hat Channel, 15.9 mm (0.63") USG SHEETROCK® Brand FIRECODE® C Core Gypsum Panel         ClarkDietrich® 087F125-18 Furring/Hat Channel, 15.9 mm (0.63")						
SPECIMEN AREA	10.98 m²	Receive Temp.	20.2°C (68.4°F)	Source Temp.	18.1°C (64.6°F)			
TECHNICIAN	MKD	Receive Humidity	56%	Source Humidity	56%			

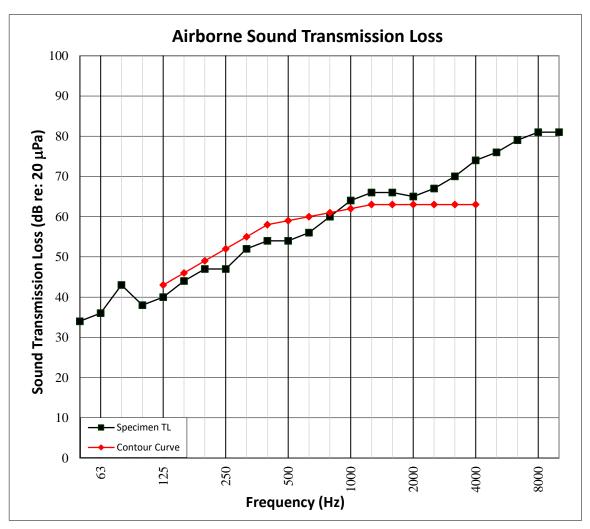



# TEST REPORT FOR CLARKDIETRICH BUILDING SYSTEMS, LLC

Report No.: J4777.06-113-11-R1 Date: 05/20/19

#### **SECTION 12**

#### **TEST RESULTS - IMPACT SOUND TRANSMISSION**

TEST DATE	3/11/2019						
DATA FILE NO.	J4777.06	4777.06					
CLIENT	ClarkDietrich Bu	ClarkDietrich Building Systems, LLC					
DESCRIPTION	Brand 2500 Floor Underl Oriented Strand Board S Truss L/360 Open Web T	ClarkDietrich Building Systems, LLC Testing Laboratory B mm (0.31") Daltile® Ceramic Tile, 0.8 mm (0.03") NobleSeal® CIS Sound Reduction Membrane, 25.4 mm (1") USG Levelrock® Brand 2500 Floor Underlayment, 6.4 mm (0.25") USG Levelrock® Brand SAM-N25™ Sound Attenuation Mat, 18.8 mm (0.74") Oriented Strand Board Sheathing, 88.9 mm (3.5") Johns Manville Unfaced R-13 Fiberglass Insulation, 406.4 mm (16") York PB Truss L/360 Open Web Truss, 31.75 mm (1.25") ClarkDietrich® Sound Clip Resilient Sound Isolation Clip, 22.3 mm (0.88") ClarkDietrich® 087F125-18 Furring/Hat Channel, 15.9 mm (0.63") USG SHEETROCK® Brand FIRECODE® C Core Gypsum Panel					
SPECIMEN AREA	10.98 m²	Maximum Temp.	20.4°C (68.7°F)	Minimum Temp.	20.1°C (68.1°F)		
TECHNICIAN	MKD	Max. Humidity	56%	Min. Humidity	55%		

FREQ	BACKGROUND SPL	ABSORPTION	NORMALIZED IMPACT SP	95% CONFIDENCE	NUMBER OF
(Hz)	(dB)	m²	(dB)	LIMIT	DEFICIENCIES
50	34.6	30.2	64	1.1	-
63	30.1	27.9	62	3.2	-
80	36.0	16.8	60	0.9	-
100	29.0	11.5	65	0.9	6
125	29.0	11.1	65	1.3	6
160	25.1	10.1	62	0.6	3
200	20.7	10.0	63	0.6	4
250	17.5	10.4	63	0.5	4
315	18.7	9.8	59	0.5	0
400	12.1	8.0	57	0.6	0
500	16.0	7.7	58	0.3	1
630	16.6	7.4	57	0.2	1
800	17.8	7.6	53	0.2	0
1000	16.5	7.4	47	0.2	0
1250	12.3	7.4	41	0.2	0
1600	8.8	8.0	39	0.2	0
2000	8.5	9.0	39	0.1	0
2500	6.5	10.0	33	0.1	0
3150	5.3	11.0	24	0.2	0
4000	5.1	12.6	17	0.4	-
5000	5.7	14.7	10	0.8	-
6300	6.3	18.6	9	0.9	-
8000	6.5	24.2	11	1.2	-
10000	6.7	24.2	10	1.1	-
<b>IIC</b> Rati	ng 53	(Impact Insula	tion Class)	Sum of Deficiencie	<mark>s</mark> 25

**Notes:** Receive Room levels less than 5 dB above the Background levels are highlighted in yellow.




# TEST REPORT FOR CLARKDIETRICH BUILDING SYSTEMS, LLC

Report No.: J4777.06-113-11-R1 Date: 05/20/19

#### **SECTION 13**

**TEST RESULTS - IMPACT SOUND TRANSMISSION GRAPH** 

TEST DATE DATA FILE NO. CLIENT DESCRIPTION		illding Systems, LLC	Seal® CIS Sound Re	duction Membrane, 25.4 mm	ACCREDITED Testing Laboratory	
	Brand 2500 Floor Underlayment, 6.4 mm (0.25") USG Levelrock® Brand SAM-N25 <sup>™</sup> Sound Attenuation Mat, 18.8 mm (0.74") Oriented Strand Board Sheathing, 88.9 mm (3.5") Johns Manville Unfaced R-13 Fiberglass Insulation, 406.4 mm (16") York PB Truss L/360 Open Web Truss, 31.75 mm (1.25") ClarkDietrich® Sound Clip Resilient Sound Isolation Clip, 22.3 mm (0.88") ClarkDietrich® 087F125-18 Furring/Hat Channel, 15.9 mm (0.63") USG SHEETROCK® Brand FIRECODE® C Core Gypsum Panel					
SPECIMEN AREA	10.98 m²	Maximum Temp.	20.4°C (68.7°F)	Minimum Temp.	20.1°C (68.1°F)	
TECHNICIAN	MKD	Max. Humidity	56%	Min. Humidity	55%	

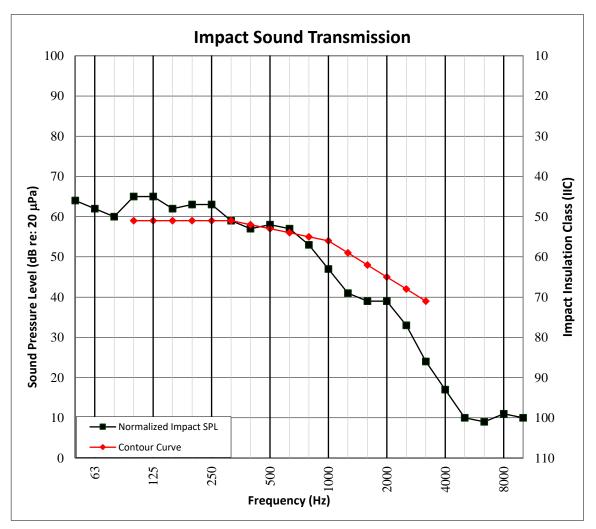



# TEST REPORT FOR CLARKDIETRICH BUILDING SYSTEMS, LLC

Report No.: J4777.06-113-11-R1 Date: 05/20/19

# SECTION 14

PHOTOGRAPHS



Photo No. 1 Source Room View of Test Specimen Installation



Photo No. 2 Receive Room View of Test Specimen Installation



# TEST REPORT FOR CLARKDIETRICH BUILDING SYSTEMS, LLC

Report No.: J4777.06-113-11-R1 Date: 05/20/19

#### **SECTION 15**

**REVISION LOG** 

<b>REVISION #</b>	DATE	PAGES	DESCRIPTION
RO	04/15/19	N/A	Original Report Issue
R1	05/20/19	All	Sound clip name corrected