

CLARKDIETRICH BUILDING SYSTEMS, LLC

ACOUSTICAL PERFORMANCE TEST REPORT

SCOPE OF WORK

ASTM E90 AND ASTM E492 TESTING ON ENGINEERED WOOD

SPECIMEN TYPE

Weyerhauser TJI Assembly - 305 mm (12") - ClarkDietrich® Sound Clip - Two-Layers USG SHEETROCK® Brand FIRECODE® C Core

REPORT NUMBER

J4776.04-113-11-R2

TEST DATE

03/13/19

ISSUE DATE

REVISED DATE

04/15/19

05/25/21

RECORD RETENTION END

03/13/23

PAGES

12

DOCUMENT CONTROL

ATI 00629 (03/21/18) RTTDS-R-AMER-Test-2844 © 2017 INTERTEK





Telephone: 717-764-7700 Facsimile: 717-764-4129 www.intertek.com/building

TEST REPORT FOR CLARKDIETRICH BUILDING SYSTEMS, LLC

Report No.: J4776.04-113-11-R2

Date: 05/25/21

REPORT ISSUED TO

CLARKDIETRICH BUILDING SYSTEMS, LLC 9100 Centre Pointe Drive, Suite 210 West Chester, Ohio 45069

SECTION 1

SCOPE

Intertek Building & Construction (B&C) was contracted by ClarkDietrich Building Systems, LLC to perform testing in accordance with ASTM E90 AND ASTM E492 on Engineered Wood. Results obtained are tested values and were secured by using the designated test method(s). Testing was conducted in the VT test chambers at Intertek B&C located in York, Pennsylvania.

This report does not constitute certification of this product nor an opinion or endorsement by this laboratory.

SECTION 2

SUMMARY OF TEST RESULTS

DATA FILE NO.	J4776.04
SERIES/MODEL:	Engineered Wood
STC	62
IIC	56

COMPLETED BY: Cody R. Snyder **COMPLETED BY:** Daniel B. Mohler Technician - Acoustical Project Lead - Acoustical TITLE: TITLE: **Testing** Testing **SIGNATURE: SIGNATURE: DATE:** 05/25/21 DATE: 05/25/21

This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of ACCREDITED the tested material, product or service must first be approved in writing by Intertek. The observations and test Testing Laborator results in this report are relevant only to the sample(s) tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.



Telephone: 717-764-7700 Facsimile: 717-764-4129 www.intertek.com/building

TEST REPORT FOR CLARKDIETRICH BUILDING SYSTEMS, LLC

Report No.: J4776.04-113-11-R2

Date: 05/25/21

SECTION 3

TEST METHODS

The specimen was evaluated in accordance with the following:

ASTM E90-09 (2016), Standard Test Method for Laboratory Measurement of Airborne Sound Transmission Loss of Building Partitions

ASTM E413-16, Classification for Rating Sound Insulation

ASTM E492-09(2016)e1, Standard Test Method for Laboratory Measurement of Impact Sound Transmission Through Floor-Ceiling Assemblies Using the Tapping Machine

ASTM E989-18, Classification for Determination of Impact Insulation Class (IIC)

ASTM E2235-04 (2012), Standard Test Method for Determination of Decay Rates for Use in Sound Insulation Test Methods

SECTION 4

MATERIAL SOURCE/INSTALLATION

The full test specimen was assembled on the day of testing by B&C. All materials provided by the client were installed on an existing B&C assembly (Weyerhauser TJI Assembly - 305 mm (12") - ClarkDietrich® Sound Clip - Two-Layers USG SHEETROCK® Brand FIRECODE® C Core) utilizing B&C-supplied materials. The assembly was installed in a steel test frame which was installed into the opening between the source and receive rooms in the test chamber. The test frame was isolated from the structure with dense neoprene gasket.

The total weight of the floor/ceiling assembly was 1119.6 kg / 2468.5 lbs. B&C will store samples of the test specimen for four years. Photographs of the test specimen are included in the report. The client did not supply drawings of the test specimen.

B&C will service this report for the entire test record retention period. Test records, such as detailed drawings, datasheets, representative samples of test specimens, or other pertinent project documentation, will be retained by B&C for the entire test record retention period.



Telephone: 717-764-7700 Facsimile: 717-764-4129 www.intertek.com/building

TEST REPORT FOR CLARKDIETRICH BUILDING SYSTEMS, LLC

Report No.: J4776.04-113-11-R2

Date: 05/25/21

SECTION 5

EQUIPMENT

INSTRUMENT	MANUFACTURER	MODEL	DESCRIPTION	ASSET #	CAL DA	TE
Data Acquisition Unit	National Instruments	PXI-4462	Data Acquisition Card	INT00977	08/18	*
Data Acquisition Unit	National Instruments	PXI-4462	Data Acquisition Card	65124	05/18	*
Data Acquisition Unit	National Instruments	PXI-4462	Data Acquisition Card	63763-1	06/18	*
Microphone Calibrator	Norsonic	Nor1251	Acoustical Calibrator	65105	06/18	
Receive Room Microphone	PCB Piezotronics	378C20	Microphone and Preamplifier	65617	06/18	
Receive Room Microphone	PCB Piezotronics	378B20	Microphone and Preamplifier	64340	09/18	
Receive Room Microphone	PCB Piezotronics	378B20	Microphone and Preamplifier	63745	06/18	
Receive Room Microphone	PCB Piezotronics	378B20	Microphone and Preamplifier	63746	09/18	
Receive Room Microphone	PCB Piezotronics	378B20	Microphone and Preamplifier	63747	07/18	
Receive Room Environmental	Comet	T7510	Temperature and Humidity	63810	10/18	
Indicator	Comet	17510	Transmitter	63811	10/18	
Source Room Microphone	PCB Piezotronics	378C20	Microphone and Preamplifier	63744	04/18	
Source Room Microphone	PCB Piezotronics	378C20	Microphone and Preamplifier	63739	04/18	
Source Room Microphone	PCB Piezotronics	378C20	Microphone and Preamplifier	63740	04/18	
Source Room Microphone	PCB Piezotronics	378C20	Microphone and Preamplifier	INT00653	01/19	
Source Room Microphone	PCB Electronics	378C20	Microphone and Preamplifier	63741	04/18	
Source Room Environmental Indicator	Comet	T7510	Temperature and Humidity Transmitter	63812	10/18	
Tapping Machine	Norsonic	Nor277	Tapping Machine	INT00936	12/18	

^{*} The calibration frequency for this equipment is every two years per the manufacturer's recommendation.

VT RECEIVE ROOM VOLUME	157.31 m³ (5555.47 ft³)
VT SOURCE ROOM VOLUME	190 m³ (6709.79 ft³)

SECTION 6

LIST OF OFFICIAL OBSERVERS

NAME	COMPANY
Daniel R. Deickman	Intertek B&C
Daniel B. Mohler	Intertek B&C

Version: 09/19/17 RTTDS-R-AMER-Test-2844 Page 4 of 12



Telephone: 717-764-7700 Facsimile: 717-764-4129 www.intertek.com/building

TEST REPORT FOR CLARKDIETRICH BUILDING SYSTEMS, LLC

Report No.: J4776.04-113-11-R2

Date: 05/25/21

SECTION 7

TEST PROCEDURE

The microphones were calibrated before conducting the tests. The air temperature and relative humidity conditions were monitored and recorded during all measurements. The average temperature and humidity of both the source and received rooms are listed in Sections 10 and 11. The maximum and minimum temperatures and humidities of the receive room from the duration of the test are listed in Sections 12 and 13.

The airborne transmission loss test was conducted in accordance with the ASTM E90 test method using the single direction method. Two background noise sound pressure level and five sound absorption measurements were conducted at each of five microphone positions. Two sound pressure level measurements were made simultaneously in both rooms, at each of five microphone positions.

The impact sound transmission test was conducted in accordance with the ASTM E492 test method. Two background noise sound pressure level, two sound pressure level measurements with the tapping machine operating at each position specified by ASTM E492, and five sound absorption measurements were conducted at each of five microphone positions.

Detailed test procedures, data for flanking limit tests, repeatability measurements, and reference specimen tests are available upon request.

SECTION 8

TEST CALCULATIONS

The STC (Sound Transmission Class) and IIC (Impact Insulation Class) ratings were calculated in accordance with ASTM E413 and ASTM E989, respectively.



Telephone: 717-764-7700 Facsimile: 717-764-4129 www.intertek.com/building

TEST REPORT FOR CLARKDIETRICH BUILDING SYSTEMS, LLC

Report No.: J4776.04-113-11-R2

Date: 05/25/21

SECTION 9

TEST SPECIMEN DESCRIPTION

AAATEDIAI	Dimensions	Thickness	MANUFACTURER AND	CHANTITY	AVERAGE			
MATERIAL	(mm/inch)	(mm/inch)	SERIES	QUANTITY	WEIGHT			
	Varied by 127	8.3 / 0.33	Shaw Danner	10.98 m²	7.31 kg/m²			
Engineered	Varied by 5	8.5 / 0.55	Silaw Dailliei	118.19 ft²	1.5 lb/ft ²			
Wood	Note: Loose laid							
	3022.6 by 3632.2	25.4./4	LICC Lavialra di ® Brand 2500	10.98 m²	49.8 kg/m²			
El	119 by 143	25.4 / 1	USG Levelrock® Brand 2500	118.19 ft ²	10.2 lb/ft ²			
Floor Underlayment		d cell foam perime	iloor underlayment, cured a reter isolation. No noticeable					
	3023 by 1003.3		USG Levelrock® Brand SAM	- 10.98 m²	0.49 kg/m ²			
Sound	119 by 39.5	6.4 / 0.25	N25™	118.19 ft ²	0.1 lb/ft²			
Attenuation Mat	Note: Loose laid	with seams overla	oping and taped	-				
	1219 by 2438	100/07/	I	10.98 m²	13.82 kg/m²			
Oriented Strand	48 by 96	18.8 / 0.74	N/A	118.19 ft ²	2.83 lb/ft ²			
Board Sheathing			n (3") by 3 mm (0.12") framin centers in the field.	ng nails on 203 mr	n (8") centers			
	520.7 by 3023		Johns Manville Unfaced R-	10.98 m²	1.32 kg/m ²			
Ethanial and	20.5 by 119	88.9 / 3.5	13	118.19 ft²	0.27 lb/ft ²			
Insulation	Note: Installed into the cavities between the joists, stapled flush to the subfloor.							
	57.2 by 3023	201.6 / 11.88	Weyerhaeuser TrusJoist®	21.16 lin m	4.46 kg/m			
TJI Joist	2.3 by 119	301.6 / 11.88	360	69.42 lin ft	3 lb/ft			
	Note: Fastened to perimeter frame on 610 mm (24") centers							
Resilient Sound	76.2 by 36.5 3 by 1.4	31.8 / 1.25	ClarkDietrich® Sound Clip	24 clips	0.06 kg/clip 0.14 lb/clip			
Isolation Clip	Note: Installed in a 610 mm by 1219 mm (24" by 48") grid pattern.							
Furring/Hat	3657.6 by 76.2 144 by 3	22.3 / 0.88	ClarkDietrich® 087F125-18	21.95 lin m 72 lin ft	0.48 kg/m 0.32 lb/ft			
Channel		Note: Installed on 610 mm (24") centers perpendicular to the trusses. The measured thickness of						
	the metal was 0.3	7 mm (0.03").						
	1219 by 3023	12.7 / 0.5	USG SHEETROCK® Brand	10.98 m²	9.76 kg/m ²			
	48 by 119	12.7 / 0.5	FIRECODE® C Core	118.19 ft ²	2 lb/ft²			
Gypsum Panel			305 mm (12") centers with 2		-			
			anels were sealed with Peco	ra AC-20 FTR caull	k and covered			
	with pressure ser 1219 by 3023	isitive tape.	USG SHEETROCK® Brand	10.98 m²	9.76 kg/m ²			
	48 by 119	12.7 / 0.5	FIRECODE® C Core	10.98 m ² 118.19 ft ²	2 lb/ft ²			
Gypsum Panel	Note: Fastened to the channels on 203 mm (8") centers with 41.3 mm (1-5/8") Type S bugle head screws. The seams of the gypsum panels were sealed with Pecora AC-20 FTR caulk and covered							
	with pressure ser	•						



Telephone: 717-764-7700 Facsimile: 717-764-4129 www.intertek.com/building

TEST REPORT FOR CLARKDIETRICH BUILDING SYSTEMS, LLC

Report No.: J4776.04-113-11-R2

Date: 05/25/21

SECTION 10

TEST RESULTS - AIRBORNE SOUND TRANSMISSION LOSS

TEST DATE	3/13/2019					
DATA FILE NO.	J4776.04	J4776.04				
CLIENT	ClarkDietrich	ClarkDietrich Building Systems, LLC				
DESCRIPTION	(0.25") USG Levelroc mm (3.5") Johns Mai mm (1.25") ClarkDie	.35 mm (0.33") Shaw Danner Engineered Wood, 25.4 mm (1") USG Levelrock® Brand 2500 Floor Underlayment, 6.4 mm (0.25") USG Levelrock® Brand SAM-N25™ Sound Attenuation Mat, 18.8 mm (0.74") Oriented Strand Board Sheathing, 88.9 nm (3.5") Johns Manville Unfaced R-13 Fiberglass Insulation, 301.63 mm (11.88") Weyerhaeuser TrusJoist® 360 TJI Joist, 31.75 nm (1.25") ClarkDietrich® Sound Clip Resilient Sound Isolation Clip, 22.3 mm (0.88") ClarkDietrich® 087F125-18 Furring/Hat Channel, 12.7 mm (0.5") USG SHEETROCK® Brand FIRECODE® C Core Gypsum Panel, 12.7 mm (0.5") USG SHEETROCK® Brand				
SPECIMEN AREA	10.98 m ²	Receive Temp.	19.7°C (67.4°F)	Source Temp.	21.1°C (70°F)	
TECHNICIAN	DRD	Receive Humidity	55%	Source Humidity	55%	

FREQ	BACKGROUND	ABSORPTION	SOURCE	RECEIVE	SPECIMEN	95%	NUMBER
FREQ	SPL	ABSURPTION	SPL	SPL	TL	CONFIDENCE	OF
(Hz)	(dB)	m²	(dB)	(dB)	(dB)	LIMIT	DEFICIENCIES
50	40.6	28.1	109	68	38	3.1	-
63	35	25.0	108	68	37	4.4	-
80	34.4	17.3	112	70	41	4.1	-
100	28.9	12.6	108	69	40	2.4	-
125	31.0	11.7	107	64	43	1.5	3
160	29.0	9.7	105	64	43	1.3	6
200	23.8	9.5	103	56	49	1.5	3
250	18.9	10.6	102	50	53	1.2	2
315	22.9	9.8	107	53	56	0.6	2
400	15.7	8.4	103	47	59	0.6	2
500	17.6	7.8	102	45	60	0.4	2
630	20.7	7.6	103	45	60	0.5	3
800	20.7	7.5	103	44	61	0.3	3
1000	21.0	7.6	103	43	62	0.5	3
1250	18.7	7.7	103	39	67	0.5	0
1600	13.1	7.8	102	36	69	0.4	0
2000	13.2	8.7	103	37	69	0.2	0
2500	11.1	9.8	101	34	69	0.3	0
3150	10.2	10.8	101	29	73	0.4	0
4000	6.8	12.3	100	26	74	0.4	0
5000	6.1	14.4	99	23	76	0.6	-
6300	6.1	18.1	99	20	78	0.6	-
8000	6.5	23.6	98	16	80	0.8	-
10000	6.7	23.6	99	12	85	1.4	-
STC Ratin	<mark>g</mark> 62	(Sound Transmi	ssion Class)		Sum o	f Deficiencies	29

Notes:

- 1) Receive Room levels less than 5 dB above the Background levels are highlighted in yellow.
- 2) Specimen TL levels listed in $\ensuremath{\textit{red}}$ are potentially limited by the laboratory flanking limit.
- 3) Specimen TL levels listed in <u>blue</u> indicate the lower limit of the transmission loss.
- 4) Specimen TL levels listed in green indicate that there has been a filler wall correction applied



Telephone: 717-764-7700 Facsimile: 717-764-4129 www.intertek.com/building

TEST REPORT FOR CLARKDIETRICH BUILDING SYSTEMS, LLC


Report No.: J4776.04-113-11-R2

Date: 05/25/21

SECTION 11

TEST RESULTS - AIRBORNE SOUND TRANSMISSION LOSS GRAPH

TEST DATE	3/13/2019						
DATA FILE NO.	J4776.04	1776.04					
CLIENT	ClarkDietrich Bu	arkDietrich Building Systems, LLC					
DESCRIPTION	(0.25") USG Levelrock® I mm (3.5") Johns Manvill mm (1.25") ClarkDietricl	.35 mm (0.33") Shaw Danner Engineered Wood, 25.4 mm (1") USG Levelrock® Brand 2500 Floor Underlayment, 6.4 mm (0.25") USG Levelrock® Brand SAM-N25™ Sound Attenuation Mat, 18.8 mm (0.74") Oriented Strand Board Sheathing, 88.9 mm (3.5") Johns Manville Unfaced R-13 Fiberglass Insulation, 301.63 mm (11.88") Weyerhaeuser TrusJoist® 360 TJI Joist, 31.75 mm (1.25") ClarkDietrich® Sound Clip Resilient Sound Isolation Clip, 22.3 mm (0.88") ClarkDietrich® 087F125-18 Furring/Hat hannel, 12.7 mm (0.5") USG SHEETROCK® Brand FIRECODE® C Core Gypsum Panel, 12.7 mm (0.5") USG SHEETROCK® Brand					
SPECIMEN AREA	10.98 m²	Receive Temp.	19.7°C (67.4°F)	Source Temp.	21.1°C (70°F)		
TECHNICIAN	DRD	Receive Humidity	55%	Source Humidity	55%		

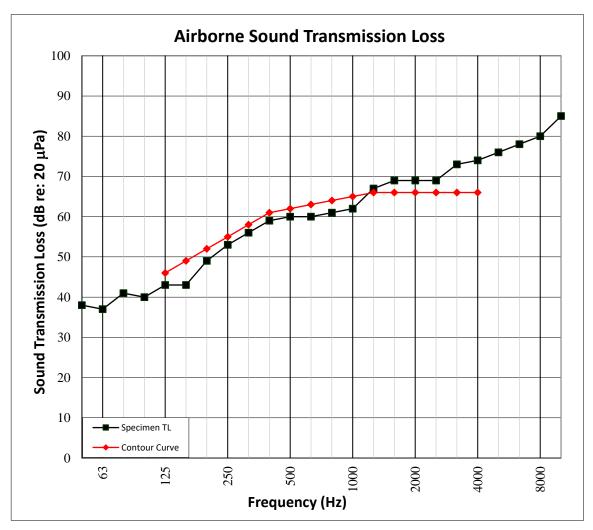



Telephone: 717-764-7700 Facsimile: 717-764-4129 www.intertek.com/building

TEST REPORT FOR CLARKDIETRICH BUILDING SYSTEMS, LLC

Report No.: J4776.04-113-11-R2

Date: 05/25/21

SECTION 12

TEST RESULTS - IMPACT SOUND TRANSMISSION

TEST DATE	3/13/2019					
DATA FILE NO.	J4776.04	4776.04				
CLIENT	ClarkDietrich Bu	arkDietrich Building Systems, LLC ACC Test				
DESCRIPTION	(0.25") USG Levelrock® E mm (3.5") Johns Manvill mm (1.25") ClarkDietrich	.35 mm (0.33") Shaw Danner Engineered Wood, 25.4 mm (1") USG Levelrock® Brand 2500 Floor Underlayment, 6.4 mm (0.25") USG Levelrock® Brand SAM-N25™ Sound Attenuation Mat, 18.8 mm (0.74") Oriented Strand Board Sheathing, 88.9 mm (3.5") Johns Manville Unfaced R-13 Fiberglass Insulation, 301.63 mm (11.88") Weyerhaeuser TrusJoist® 360 TJI Joist, 31.75 mm (1.25") ClarkDietrich® Sound Clip Resilient Sound Isolation Clip, 22.3 mm (0.88") ClarkDietrich® 087F125-18 Furring/Hat hannel, 12.7 mm (0.5") USG SHEETROCK® Brand FIRECODE® C Core Gypsum Panel, 12.7 mm (0.5") USG SHEETROCK® Brand				
SPECIMEN AREA	10.98 m²	Maximum Temp.	19.7°C (67.4°F)	Minimum Temp.	19.7°C (67.4°F)	
TECHNICIAN	DRD	Max. Humidity	55%	Min. Humidity	55%	

FREQ	BACKGROUND SPL	ABSORPTION	NORMALIZED IMPACT SPL	95% CONFIDENCE	NUMBER OF
(Hz)	(dB)	m²	(dB)	LIMIT	DEFICIENCIES
50	39.7	31.9	65	2.0	-
63	38.7	24.3	61	2.9	-
80	36.9	18.2	62	2.5	-
100	29.5	13.1	62	1.2	6
125	32.3	11.5	64	1.6	8
160	29.5	9.7	61	1.2	5
200	25.2	9.6	58	0.5	2
250	21.0	10.4	58	0.8	2
315	24.1	10.1	56	0.7	0
400	18.5	8.5	52	0.6	0
500	19.4	7.7	51	0.4	0
630	22.8	7.4	52	0.3	0
800	22.0	7.5	49	0.2	0
1000	21.4	7.5	43	0.3	0
1250	18.9	7.6	36	0.2	0
1600	15.7	7.8	32	0.2	0
2000	15.0	8.7	28	0.5	0
2500	11.8	9.8	22	0.4	0
3150	10.0	10.7	12	0.3	0
4000	7.3	12.3	8	0.2	-
5000	6.4	14.5	6	0.3	-
6300	6.2	18.0	7	0.3	-
8000	6.6	23.7	8	0.4	-
10000	6.7	23.7	8	0.5	-
IIC Rating	5 6	(Impact Insulati	on Class)	Sum of Deficiencies	23

Notes: Receive Room levels less than 5 dB above the Background levels are highlighted in yellow.



Telephone: 717-764-7700 Facsimile: 717-764-4129 www.intertek.com/building

TEST REPORT FOR CLARKDIETRICH BUILDING SYSTEMS, LLC


Report No.: J4776.04-113-11-R2

Date: 05/25/21

SECTION 13

TEST RESULTS - IMPACT SOUND TRANSMISSION GRAPH

TEST DATE	3/13/2019	•				
DATA FILE NO.	J4776.04	4776.04				
CLIENT	ClarkDietrich Bu	ClarkDietrich Building Systems, LLC				
DESCRIPTION	(0.25") USG Levelrock® I mm (3.5") Johns Manvill mm (1.25") ClarkDietricl	35 mm (0.33") Shaw Danner Engineered Wood, 25.4 mm (1") USG Levelrock® Brand 2500 Floor Underlayment, 6.4 mm .25") USG Levelrock® Brand SAM-N25™ Sound Attenuation Mat, 18.8 mm (0.74") Oriented Strand Board Sheathing, 88.9 m (3.5") Johns Manville Unfaced R-13 Fiberglass Insulation, 301.63 mm (11.88") Weyerhaeuser TrusJoist® 360 TJI Joist, 31.75 m (1.25") ClarkDietrich® Sound Clip Resilient Sound Isolation Clip, 22.3 mm (0.88") ClarkDietrich® 087F125-18 Furring/Hat hannel, 12.7 mm (0.5") USG SHEETROCK® Brand FIRECODE® C Core Gypsum Panel, 12.7 mm (0.5") USG SHEETROCK® Brand				
SPECIMEN AREA	10.98 m²	Maximum Temp.	19.7°C (67.4°F)	Minimum Temp.	19.7°C (67.4°F)	
TECHNICIAN	DRD	Max. Humidity	55%	Min. Humidity	55%	

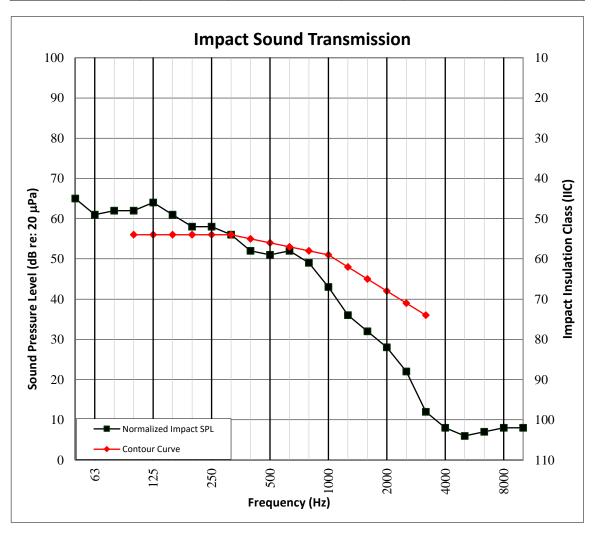



Telephone: 717-764-7700 Facsimile: 717-764-4129 www.intertek.com/building

TEST REPORT FOR CLARKDIETRICH BUILDING SYSTEMS, LLC

Report No.: J4776.04-113-11-R2

Date: 05/25/21

SECTION 14

PHOTOGRAPHS



Photo No. 1 Source Room View of Test Specimen Installation



Photo No. 2
Receive Room View of Test Specimen Installation



Telephone: 717-764-7700 Facsimile: 717-764-4129 www.intertek.com/building

TEST REPORT FOR CLARKDIETRICH BUILDING SYSTEMS, LLC

Report No.: J4776.04-113-11-R2

Date: 05/25/21

SECTION 15

REVISION LOG

REVISION #	DATE	PAGES	DESCRIPTION
RO	04/15/19	N/A	Original Report Issue
R1	05/20/19	All	Sound clip name corrected
R2	05/25/21	Pages 6-10	Drywall thickness corrected