


DRIFT RAIL AND CLIP (DRC) - DESIGN GUIDE

ATTACHMENT TO STRUCTURAL STEEL: #12-24 FASTENERS
ATTACHMENT TO STUD: AS A DEFLECTION CONNECTION

Drift Rail and Clip - 12ga Clip / 12ga Rail

ALLOWABLE DRIFT RAIL CLIP LOADS
USING CLIP AS A DEFLECTION CONNECTION


Clip designation	Stud gauge (mils)	Anchor to structure	Framing Connection		ASD Allowable Loads (lbs)	
			Screw Pattern	No. of Screws	F2 (Tension)	F3 (Compression)
DRC3-97	20ga (33mil)	(2) x #12-24 HWH Fasteners to 3/16" ASTM A36 Steel	See Figure	(2) x #14	560	600
	18ga (43mil)			(2) x #14	655	670
	16ga (54mil)			(2) x #14	1000	970
	14ga (68mil)			(2) x #14	1030	1325
DRC6-97	20ga (33mil)	(2) x #12-24 HWH Fasteners to 3/16" ASTM A36 Steel	See Figure	(2) x #14	1030	2040
	18ga (43mil)			(3) x #14	560	600
	16ga (54mil)			(3) x #14	655	670
	14ga (68mil)			(3) x #14	1000	970
DRC8-97	20ga (33mil)	(2) x #12-24 HWH Fasteners to 3/16" ASTM A36 Steel	See Figure	(3) x #14	1030	1325
	18ga (43mil)			(3) x #14	1030	2040
	16ga (54mil)			(3) x #14	560	620
	14ga (68mil)			(3) x #14	655	730
DRC8-97	16ga (54mil)	(2) x #12-24 HWH Fasteners to 3/16" ASTM A36 Steel	See Figure	(3) x #14	1000	1060
	12ga (97mil)			(3) x #14	1030	1340
DRC8-97	14ga (68mil)	(2) x #12-24 HWH Fasteners to 3/16" ASTM A36 Steel	See Figure	(3) x #14	1030	1965
	12ga (97mil)			(3) x #14	1030	1965

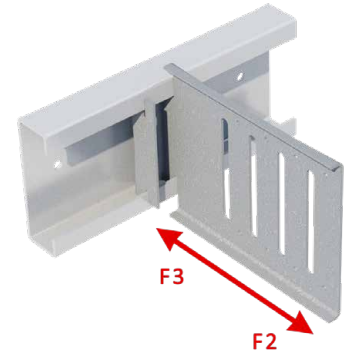

Drift Rail and Clip - 14ga Clip / 12ga Rail

ALLOWABLE DRIFT RAIL CLIP LOADS
USING CLIP AS A DEFLECTION CONNECTION

Clip designation	Stud gauge (mils)	Anchor to structure	Framing Connection		ASD Allowable Loads (lbs)	
			Screw Pattern	No. of Screws	F2 (Tension)	F3 (Compression)
DRC3-68	20ga (33mil)	(2) x #12-24 HWH Fasteners to 3/16" ASTM A36 Steel	See Figure	(2) x #14	490	440
	18ga (43mil)			(2) x #14	540	520
	16ga (54mil)			(2) x #14	850	870
	14ga (68mil)			(2) x #14	850	1170
DRC6-68	20ga (33mil)	(2) x #12-24 HWH Fasteners to 3/16" ASTM A36 Steel	See Figure	(2) x #14	850	1600
	18ga (43mil)			(3) x #14	490	440
	16ga (54mil)			(3) x #14	540	520
	14ga (68mil)			(3) x #14	850	870
DRC8-68	20ga (33mil)	(2) x #12-24 HWH Fasteners to 3/16" ASTM A36 Steel	See Figure	(3) x #14	850	1170
	18ga (43mil)			(3) x #14	850	1600
	16ga (54mil)			(3) x #14	490	485
	14ga (68mil)			(3) x #14	540	620
DRC8-68	16ga (54mil)	(2) x #12-24 HWH Fasteners to 3/16" ASTM A36 Steel	See Figure	(3) x #14	850	900
	12ga (97mil)			(3) x #14	850	1105
DRC8-68	14ga (68mil)	(2) x #12-24 HWH Fasteners to 3/16" ASTM A36 Steel	See Figure	(3) x #14	850	1710
	12ga (97mil)			(3) x #14	850	1710

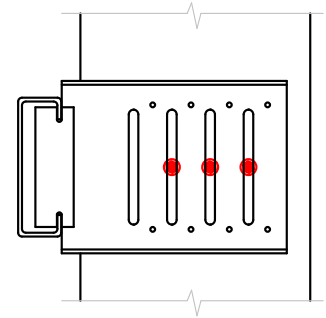

(3) #14 Deflection Screw Pattern
Shown in a DRC6 Clip

Notes:

- 1 Allowable loads (ASD) listed are for Drift Rail Clip where Drift Rail is attached to 3/16" thick ASTM A36 steel using (2) x #12-24 HWH fasteners spaced 2" apart at 6" on center spacing.
- 2 (2) x #12-24 HWH fasteners must be fastened at every 6" o.c. for Drift Rail attachment to 3/16" ASTM A36 steel structure. Other fasteners may be used to achieve full clip capacity but must be designed separately.
- 3 Allowable loads have not been increased for wind, seismic, or other factors.
- 4 Minimum (2) x #14 shouldered screws (for DRC3) and (3) x #14 shouldered screws (for DRC6 and DRC8) must be used to secure the Drift Rail Clip for attachment to stud (#14 shouldered screws provided with each Drift Rail Clip).
- 5 It is the responsibility of the designer to properly detail connections on the contract drawings.


DRIFT RAIL AND CLIP (DRC) - DESIGN GUIDE

ATTACHMENT TO STRUCTURAL STEEL: #12-24 FASTENERS
ATTACHMENT TO STUD: FIXED CONNECTION W/(4)#10-16

Drift Rail and Clip - 12ga Clip / 12ga Rail

ALLOWABLE DRIFT RAIL CLIP LOADS
USING CLIP AS A FIXED CONNECTION


Clip designation	Stud gauge (mils)	Anchor to structure	Framing Connection		ASD Allowable Loads (lbs)			
			Screw Pattern	No. of Screws	F1 (In-Plane)	F2 (Tension)	F3 (Compression)	F4 (Shear)
DRC3-97	20ga (33mil)	(2) x #12-24 HWH Fasteners to 3/16" ASTM A36 Steel	See Figure	(4) x #10	155	560	600	280
	18ga (43mil)			(4) x #10	155	655	670	415
	16ga (54mil)			(4) x #10	155	1000	970	840
	14ga (68mil)			(4) x #10	155	1030	1325	865
	12ga (97mil)			(4) x #10	155	1030	2040	865
DRC6-97	20ga (33mil)	(2) x #12-24 HWH Fasteners to 3/16" ASTM A36 Steel	See Figure	(4) x #10	155	560	600	235
	18ga (43mil)			(4) x #10	155	655	670	345
	16ga (54mil)			(4) x #10	155	1000	970	705
	14ga (68mil)			(4) x #10	155	1030	1325	725
	12ga (97mil)			(4) x #10	155	1030	2040	725
DRC8-97	20ga (33mil)	(2) x #12-24 HWH Fasteners to 3/16" ASTM A36 Steel	See Figure	(4) x #10	140	560	620	240
	18ga (43mil)			(4) x #10	140	655	730	360
	16ga (54mil)			(4) x #10	140	1000	1060	725
	14ga (68mil)			(4) x #10	140	1030	1340	745
	12ga (97mil)			(4) x #10	140	1030	1965	745

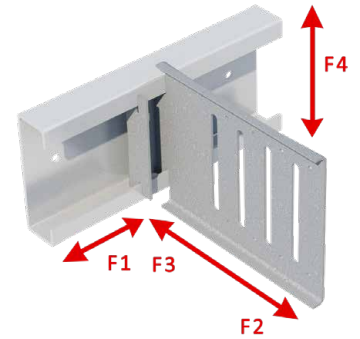

Drift Rail and Clip - 14ga Clip / 12ga Rail

ALLOWABLE DRIFT RAIL CLIP LOADS
USING CLIP AS A FIXED CONNECTION

Clip designation	Stud gauge (mils)	Anchor to structure	Framing Connection		ASD Allowable Loads (lbs)			
			Screw Pattern	No. of Screws	F1 (In-Plane)	F2 (Tension)	F3 (Compression)	F4 (Shear)
DRC3-68	20ga (33mil)	(2) x #12-24 HWH Fasteners to 3/16" ASTM A36 Steel	See Figure	(4) x #10	115	490	440	280
	18ga (43mil)			(4) x #10	115	540	520	415
	16ga (54mil)			(4) x #10	115	850	870	740
	14ga (68mil)			(4) x #10	115	850	1170	740
	12ga (97mil)			(4) x #10	115	850	1600	805
DRC6-68	20ga (33mil)	(2) x #12-24 HWH Fasteners to 3/16" ASTM A36 Steel	See Figure	(4) x #10	115	490	440	235
	18ga (43mil)			(4) x #10	115	540	520	345
	16ga (54mil)			(4) x #10	115	850	870	705
	14ga (68mil)			(4) x #10	115	850	1170	725
	12ga (97mil)			(4) x #10	115	850	1600	725
DRC8-68	20ga (33mil)	(2) x #12-24 HWH Fasteners to 3/16" ASTM A36 Steel	See Figure	(4) x #10	120	490	485	240
	18ga (43mil)			(4) x #10	120	540	620	360
	16ga (54mil)			(4) x #10	120	850	900	725
	14ga (68mil)			(4) x #10	120	850	1105	745
	12ga (97mil)			(4) x #10	120	850	1710	745

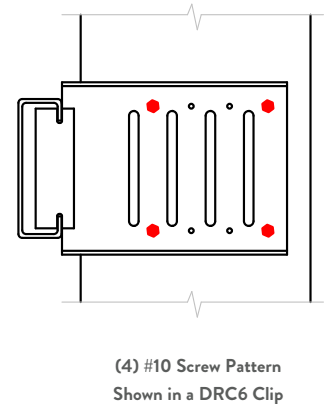

Notes:

- 1 Allowable loads (ASD) listed are for Drift Rail Clip where Drift Rail is attached to 3/16" thick ASTM A36 steel using (2) x #12-24 HWH fasteners spaced 2" apart at 6" on center spacing.
- 2 (2) x #12-24 HWH fasteners must be fastened at every 6" o.c. for Drift Rail attachment to 3/16" ASTM A36 steel structure. Other fasteners may be used to achieve full clip capacity but must be designed separately.
- 3 Allowable loads have not been increased for wind, seismic, or other factors.
- 4 Where fasteners are loaded simultaneously, load interaction must be considered following fastener manufacturer guidelines.
- 5 Use linear load interaction for combined loading conditions.
- 6 Minimum (4) x #10-16 screws must be used to secure the Drift Rail Clip for attachment to stud.
- 7 It is the responsibility of the designer to properly detail connections on the contract drawings.
- 8 F1 (In-Plane) loads are based on using a Drift Locking Clip (DRLC) or Drift Locking Angle (DRLA) restricting Drift Clip lateral movement.


DRIFT RAIL AND CLIP (DRC) - DESIGN GUIDE

ATTACHMENT TO STRUCTURAL STEEL: #12-24 FASTENERS
ATTACHMENT TO STUD: FIXED CONNECTION W/(8)#10-16

Drift Rail and Clip - 12ga Clip / 12ga Rail

ALLOWABLE DRIFT RAIL CLIP LOADS
USING CLIP AS A FIXED CONNECTION


Clip designation	Stud gauge (mils)	Anchor to structure	Framing Connection		ASD Allowable Loads (lbs)			
			Screw Pattern	No. of Screws	F1 (In-Plane)	F2 (Tension)	F3 (Compression)	F4 (Shear)
DRC6-97	20ga (33mil)	(2) x #12-24 HWH Fasteners to 3/16" ASTM A36 Steel	See Figure	(8) x #10	155	560	600	395
	18ga (43mil)			(8) x #10	155	655	670	585
	16ga (54mil)			(8) x #10	155	1000	970	875
	14ga (68mil)			(8) x #10	155	1030	1325	920
	12ga (97mil)			(8) x #10	155	1030	2040	920
DRC8-97	20ga (33mil)	(2) x #12-24 HWH Fasteners to 3/16" ASTM A36 Steel	See Figure	(8) x #10	140	560	620	375
	18ga (43mil)			(8) x #10	140	655	730	555
	16ga (54mil)			(8) x #10	140	1000	1060	910
	14ga (68mil)			(8) x #10	140	1030	1340	910
	12ga (97mil)			(8) x #10	140	1030	1965	910

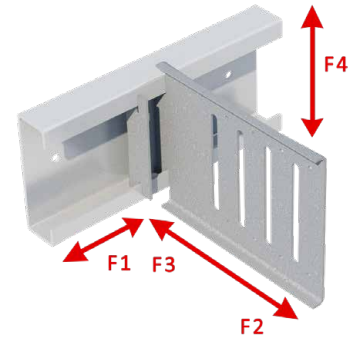

Drift Rail and Clip - 14ga Clip / 12ga Rail

ALLOWABLE DRIFT RAIL CLIP LOADS
USING CLIP AS A FIXED CONNECTION

Clip designation	Stud gauge (mils)	Anchor to structure	Framing Connection		ASD Allowable Loads (lbs)			
			Screw Pattern	No. of Screws	F1 (In-Plane)	F2 (Tension)	F3 (Compression)	F4 (Shear)
DRC6-68	20ga (33mil)	(2) x #12-24 HWH Fasteners to 3/16" ASTM A36 Steel	See Figure	(8) x #10	115	490	440	395
	18ga (43mil)			(8) x #10	115	540	520	585
	16ga (54mil)			(8) x #10	115	850	870	740
	14ga (68mil)			(8) x #10	115	850	1170	740
	12ga (97mil)			(8) x #10	115	850	1600	805
DRC8-68	20ga (33mil)	(2) x #12-24 HWH Fasteners to 3/16" ASTM A36 Steel	See Figure	(8) x #10	120	490	485	375
	18ga (43mil)			(8) x #10	120	540	620	555
	16ga (54mil)			(8) x #10	120	850	900	800
	14ga (68mil)			(8) x #10	120	850	1105	800
	12ga (97mil)			(8) x #10	120	850	1710	865

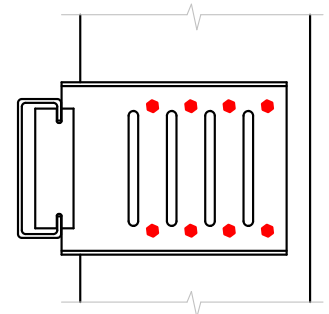

(8) #10 Screw Pattern
Shown in a DRC6 Clip

Notes:

- 1 Allowable loads (ASD) listed are for Drift Rail Clip where Drift Rail is attached to 3/16" thick ASTM A36 steel using (2) x #12-24 HWH fasteners spaced 2" apart at 6" on center spacing.
- 2 (2) x #12-24 HWH fasteners must be fastened at every 6" o.c. for Drift Rail attachment to 3/16" ASTM A36 steel structure. Other fasteners may be used to achieve full clip capacity but must be designed separately.
- 3 Allowable loads have not been increased for wind, seismic, or other factors.
- 4 Where fasteners are loaded simultaneously, load interaction must be considered following fastener manufacturer guidelines.
- 5 Use linear load interaction for combined loading conditions.
- 6 Minimum (8) x #10-16 screws must be used to secure the Drift Rail Clip for attachment to stud.
- 7 It is the responsibility of the designer to properly detail connections on the contract drawings.
- 8 F1 (In-Plane) loads are based on using a Drift Locking Clip (DRLC) or Drift Locking Angle (DRLA) restricting Drift Clip lateral movement.