

Drift FastClip™ Slide Clip (D-FCSC)-14GA

Curtain Wall/Bypass with Drift & Vertical Deflection

Vertical and lateral building movement up to 2".

ClarkDietrich Drift FastClip™ Slide Clip 68mils (14ga) is used to attach exterior curtain-wall studs to the building structure and provide for both vertical and lateral movement. FastClip Deflection Screws are provided with each clip for attachment to the wall studs and allow for 2" vertical deflection (1" up and down) to ensure friction-free sliding. Step bushing are provided for the connection to the structure and allow for 2" lateral deflection (1" left and right).




PRODUCT DIMENSIONS


- D-FCSC3.5: 3-3/4" x 4" x 3-1/2" long
- D-FCSC6: 3-3/4" x 4" x 6" long
- D-FCSC8: 3-3/4" x 4" x 8" long

MATERIAL SPECIFICATIONS


- Gauge: 14 gauge (68mil)
- Design Thickness: 0.0713 inches
- Yield Strength: 50ksi
- Coating: G90
- ASTM: A653/A1003



D-FCSC3.5

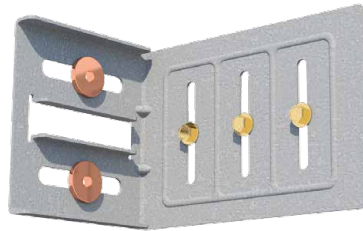

D-FCSC6

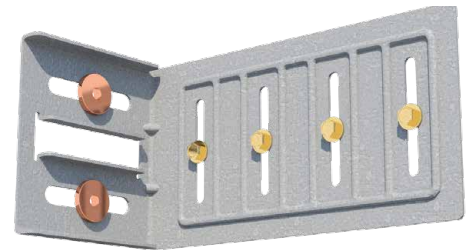

D-FCSC8

Drift FastClip™ SLIDE CLIPS

Product code	Thickness		Clip Length	No. of Bushings per Clip	No. of Slots & Deflection Screws per Clip
	Gauge	Mils			
D-FCSC3.5	14	68	3-1/2"	2	2
D-FCSC6	14	68	6"	2	3
D-FCSC8	14	68	7-3/4"	2	4

- Packaging:** 25 Clips per Bucket
 D-FCSC3.5 includes (55) FastClip Deflection Screws & (50) Bushings
 D-FCSC6 includes (80) FastClip Deflection Screws & (50) Bushings
 D-FCSC8 includes (110) FastClip Deflection Screws & (50) Bushings



Copper Bushing for 14ga Clips




FastClip Deflection Screws (For Stud Connection)


INSTALLATION

To attach the clip to the cold-formed steel framing, two, three or four FastClip deflection screws (based upon clip size), shall be driven through the slotted holes and positioned to allow for the appropriate building deflection.

Attachment to the primary structure can be made with screws, or bolt anchors. Structure attachments shall be driven through the drift bushings and the Drift FastClip™ - centered in the drift slots.



STRUCTURE CENTER CONNECTION¹
Drift Bushings centered in slots



STRUCTURE OFFSET CONNECTION²
Drift Bushings at far end of slots

Drift FastClip™ Slide Clip Allowable Loads		ATTACHED TO MIN. 3/16" STRUCTURAL STEEL WITH (2) 1/4"-20 SCREWS					
Clip Designation	Stud thickness ga (mils)	Fasteners		Tension or Compression Load Capacity			
		to Framing	to Structure	ASD		LRFD	
				Center (lbs) ³	Offset (lbs) ³	Center (lbs) ³	Offset (lbs) ³
D-FCSC3.5 14ga (68mils)	20ga (33mil) 33ksi	(2) #14 FastClip Deflection Screws	(2) 1/4" - 20 with Drift Bushing	395	383	632	613
	18ga (43mil) 33ksi			579	487	926	779
	16ga (54mil) 50ksi			612	526	979	841
	14ga (68mil) 50ksi			612	548	979	876
	12ga (97mil) 50ksi			648	548	1037	876
D-FCSC6 14ga (68mils)	20ga (33mil) 33ksi	(3) #14 FastClip Deflection Screws	(2) 1/4" - 20 with Drift Bushing	627	509	1003	815
	18ga (43mil) 33ksi			640	534	1024	855
	16ga (54mil) 50ksi			640	541	1024	866
	14ga (68mil) 50ksi			667	559	1067	895
	12ga (97mil) 50ksi			667	559	1067	895
D-FCSC8 14ga (68mils)	18ga (43mil) 33ksi	(4) #14 FastClip Deflection Screws	(2) 1/4" - 20 with Drift Bushing	597	499	955	798
	16ga (54mil) 50ksi			636	566	1018	906
	14ga (68mil) 50ksi			671	574	1074	918
	12ga (97mil) 50ksi			671	645	1074	1032

Notes:

- 1 ¹ #14 FastClip™ Deflection Screws centered in slots, Drift bushings centered in slots.
- 2 ² #14 FastClip™ Deflection Screws centered in slots, Drift bushings at end of slots.
- 3 Load capacities have not been increased for wind, seismic, or other factors.
- 4 Load Capacities include 1/8" service load limitation.
- 5 Load Capacities calculated considering (2) 1/4"-20 screws for structure connection to 3/16" steel.
- 6 Refer to ICC-ESR-3332 for allowable loads using 1/4"-20 screw fasteners with various plate connection thickness.
- 7 #14 FastClip™ Deflection Screws for framing connection and step bushings for structure connection are provided with D-FCSC clip.

