June 30, 2018

#### ClarkDietrich

9050 Centre Point Drive, Suite 400 West Chester, Ohio 45069

Attention: Mr. Adam Shoemaker

Subject: ClarkDietrich 18 MIL and 19 MIL Studs

**Acoustical Evaluation** 

VA Project Number 5123-017

#### Dear Adam:

This letter presents Veneklasen Associates, Inc. (VA) review of the STC rating changes when the ClarkDietrich 18 MIL studs would be used in place of the ClarkDietrich 19 MIL studs. These tests include single stud construction assemblies that would utilize these stud types. VA reviewed the following test reports:

Test WEAL TL13-187 (STC 45). Test WEAL TL13-188 (STC 44). Test WEAL TL13-189 (STC 41). Test WEAL TL13-190 (STC 38). Test WEAL TL13-191 (STC 48). Test WEAL TL13-192 (STC 54). Test WEAL TL13-193 (STC 59).

In general, test assemblies are installed having 19 MIL studs with single stud construction with gypsum board directly attached. Additionally, tests include single stud walls with the inclusion of a resilient channel on one side of the assembly.

The metal thickness used for 19 MIL studs is typically a specified steel thickness between 0.019 and 0.020 inches. Whereas, 18 MIL studs are typically less metal and approximately 0.0179 inches in thickness.

VA has reviewed the information provided from the tests and the method of measurement. We have also reviewed the specifications of the steel studs. VA has completed computer modeling of the stud performance. In comparing the specifications of the studs used in these tests (19 MIL) to the 18 MIL proposed models, we have found that the acoustical properties of the tested walls to be equal or slightly better with the 18 MIL configuration. In our professional opinion, if the referenced tests were completed with the ClarkDietrich 18 MIL studs, the acoustical results would be substantially similar meaning that there would be no noticeable difference in acoustical performance.

If you have any questions or comments, please do not hesitate to call.

Sincerely,

Veneklasen Associates, Inc.

John LoVerde, FASA Principal



# WESTERN ELECTRO - ACOUSTIC LABORATORY

A division of Veneklasen Associates, Inc.

TESTING • CALIBRATION • RESEARCH

25132 Rye Canyon Loop Santa Clarita, California 91355 Tel: (661) 775-3741 Fax: (661) 775-3742 www.weal.com

## SOUND TRANSMISSION LOSS TEST REPORT NO. TL13-189

CLIENT:

**ClarkDietrich Building Systems** 

Page 1 of 2

9100 Centre Pointe Drive, Suite 210

22 February 2013

West Chester, OH 45069

TEST DATE: 21 February 2013

### INTRODUCTION

The methods and procedures used for each test conform to the provisions and requirements of ASTM E 90-09, Standard Test Method for Laboratory Measurement of Airborne Sound Transmission Loss of Building Partitions and ASTM E2235-04<sup>£1</sup>, Standard Test Method for Determination of Decay Rates for Use in Sound Insulation Test Methods. Copies of the test standard are available at <a href="www.astm.org">www.astm.org</a>. The test chamber source and receiving room volumes are 204 and 148.4 cubic meters respectively. Western Electro-Acoustic Laboratory is accredited by the United States Department of Commerce, National Institute of Standards and Technology under the National Voluntary Accreditation Program (NVLAP) Lab Code 100256-0 for this test procedure. This test report relates only to the item(s) tested. This report must not be used to claim product certification, approval, or endorsement by WEAL, NVLAP, NIST or any agency of the federal government.

#### **DESCRIPTION OF TEST SPECIMEN**

The test specimen was a wall assembly constructed from metal studs and Type X gypsum board. The metal studs were 92 mm (3-5/8 inch) ClarkDietrich™ Building Systems ProSTUD 19 mil (20 GA equivalent) and were spaced at 610 mm (24 inches) O.C. The head and sill tracks were also 92 mm (3-5/8 inch) ClarkDietrich ProSTUD 19 mil (20 GA equivalent). The frame was isolated from the test opening with 6.4 mm (1/4 inch) neoprene pads. Full width Owens Corning R-13 un-faced fiberglass batts, 89 mm (3-1/2 inch) thick, were installed in the stud spaces. On both sides, one layer of 15.9 mm (5/8 inch) thick USG Type X gypsum board was screwed to the studs at 203 mm (8 inches) O.C. around the perimeter and 305 mm (12 inches) O.C. in the field using 28.6 mm (1-1/8 inch) drywall screws. All gypsum board was oriented vertically and the joints were staggered on opposite sides of the wall and between layers. On both sides, the joints and perimeters were sealed with a bead of caulking and metal foil tape. All screw heads were covered with metal foil tape. The overall dimensions of the wall assembly were 2.44 m (96 inches) high by 124 mm (4-7/8 inches) thick. The overall weight of the assembly was estimated to be 147 kg (324 lbs) for a calculated surface density of 24.8 kg/m² (5.07 lbs./ft²).

#### **RESULTS OF THE MEASUREMENTS**

Mange

One-third octave band sound transmission loss values are plotted and tabulated on the attached sheet. ASTM minimum volume requirements are met at 80 Hz and above. The Outdoor-Indoor Transmission Class rating determined in accordance with ASTM E 1332-10a was OITC-30. The Sound Transmission Class rating determined in accordance with ASTM E 413-10 was STC-41.

Approved:

Respectfully submitted,

Western Electro-Acoustic Laboratory

Gary E. Mange


Raul Martinez

Acoustical Test Technician

NVLAP LAB CODE 100256-0

# WESTERN ELECTRO-ACOUSTIC LABORATORY

Report No. TL13-189

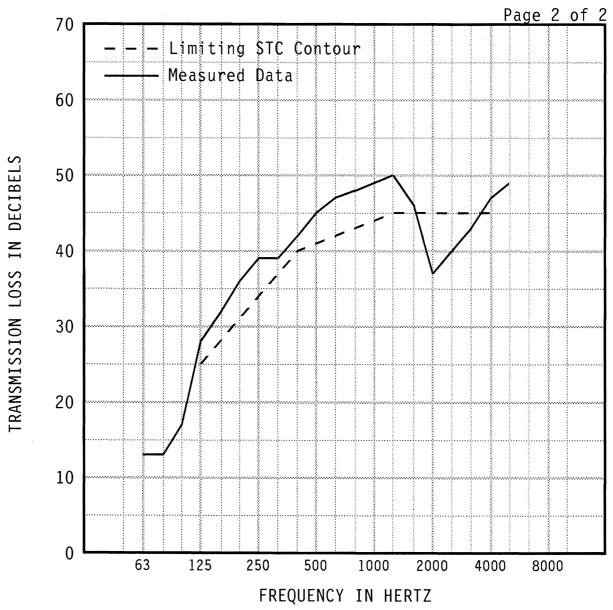

| 1/3 OCT BND CNTR FREQ                            | 63                        | 80         | 100        | 125        | 160        | 200               | 250               | 315               | 400        | 500        |
|--|---------------------------|------------|------------|------------|------------|-------------------|-------------------|-------------------|------------|------------|
| TL in dB<br>95% Confidence in dB<br>deficiencies | 13<br>1.42                | 13<br>1.92 | 17<br>2.07 | 28<br>1.47 | 32<br>0.89 | 36<br>0.76        | 39<br>0.80        | 39<br>0.52        | 42<br>0.36 | 45<br>0.38 |
| 1/3 OCT BND CNTR FREQ                            | 630                       | 800        | 1000       | 1250       | 1600       | 2000              | 2500              | 3150              | 4000       | 5000       |
| TL in dB<br>95% Confidence in dB<br>deficiencies | 47<br>0.29                | 48<br>0.44 | 49<br>0.38 | 50<br>0.39 | 46<br>0.36 | 37<br>0.56<br>(8) | 40<br>0.55<br>(5) | 43<br>0.31<br>(2) | 47<br>0.32 | 49<br>0.50 |
| EWR OITC<br>46 30                                | specimen Area. 04 Sq. It. |            |            |            |            |                   |                   |                   |            |            |

Test Date: 21 February 2013
Report must be distributed in its entirety except with written authorization from Western Electro-Acoustic Laboratory

