1512 S BATAVIA AVENUE GENEVA, IL 60134 630-232-0104 An A L I O N Technical Center

RIVERBANK.ALIONSCIENCE.COM
FOUNDED 1918 BY
WALLACE CLEMENT SABINE

Test Report

SPONSOR: ClarkDietrich

West Chester, OH

Impact Sound Transmission RALTM-IN21-010

CONDUCTED: 2021-01-27 Page 1 of 14

ON: 8-Inch Concrete Slab with vinyl plank flooring, insulated single-layer gypsum board ceiling on ClarkDietrich Sound ClipsTM (CDSC)

TEST METHODOLOGY

Riverbank Acoustical LaboratoriesTM is accredited by the U.S. Department of Commerce, National Institute of Standards and Technology (NIST) under the National Voluntary Laboratory Accreditation Program (NVLAP) as an ISO 17025:2017 Laboratory (NVLAP Lab Code: 100227-0) and for this test procedure. The test reported in this document conformed explicitly with ASTM E492-09: "Standard Test Method for Laboratory Measurement of Impact Sound Transmission Through Floor-Ceiling Assemblies Using the Tapping Machine." The single number rating of the specimen was calculated according to ASTM E989-18: "Standard Classification for Determination of Single-Number Metrics for Impact Noise." A description of the measurement procedure and room specifications are available upon request. The results presented in this report apply to the individual test specimen as described and assembled.

INFORMATION PROVIDED BY SPONSOR

The test specimen was designated by the sponsor as 8-Inch Concrete Slab with vinyl plank flooring, insulated single-layer gypsum board ceiling on ClarkDietrich Sound ClipsTM (CDSC). The following nominal product information was provided by the sponsor prior to testing. The accuracy of such sponsor-provided information can affect the validity of the test results.

Products Under Test

Isolating Clips

Trade Name: ClarkDietrich Sound ClipsTM (CDSC)

Manufacturer: ClarkDietrich

Furring Channel

Trade Name: 087F125-18 (33ksi, G40EQ)

Material: 7/8 in. Furring/Furring channel – 25 ga (18 mils)

Manufacturer: ClarkDietrich



® RIVERBANK ACOUSTICAL LABORATORIES IS ACCREDITED BY NVLAP (LAB CODE 100227-0) FOR ACOUSTICAL TESTING SERVICES IN ACCORDANCE WITH ISO/IEC 17025:2017 AND FOR THIS PROCEDURE. THIS REPORT MUST NOT BE USED BY THE CLIENT TO CLAIM PRODUCT CERTIFICATION, APPROVAL, OR ENDORSEMENT BY RAL, NVLAP, NIST, OR ANY AGENCY OF THE U.S. GOVERNMENT.

1512 S BATAVIA AVENUE GENEVA, IL 60134 630-232-0104 An A L I O N Technical Center

RIVERBANK.ALIONSCIENCE.COM
FOUNDED 1918 BY
WALLACE CLEMENT SABINE

Test Report

 ClarkDietrich
 RALTM-IN21-010

 2021-01-27
 Page 2 of 14

SPECIMEN MEASUREMENTS & TEST CONDITIONS

The construction contractor (Seth Priser) and RAL staff compiled a detailed construction specification as follows, in order of installation:

Concrete Slab

Material: Wire-reinforced concrete

Dimensions: 4 @ 610 mm (24 in.) x 4267 mm (168 in.)

Thickness: 203 mm (8 in.)

Overall Weight: 5023.08 kg (11074 lbs)

Mass per Unit Area: 482.75 kg/m² (98.875 lbs/ft²)

Installation: Laid in test opening over 152.4 mm (6 in.) wide knee walls constructed

from isolated wood framing

Joint undersides sealed with acoustical caulk and tape

Top of joints filled with general purpose sand, sealed with premixed

masonry joint compound

Ceiling Assembly

Isolating Clips

Material: Metal, rubber (see Products Under Test)
Dimensions: 76 mm (3 in.) long by 35 mm (1.375 in.) wide

Thickness: 32 mm (1.25 in.)

Installation: Fastened through center to anchor holes in underside of concrete slabs

Staggered array, spaced 1219 mm (48 in.) on center, 16 pieces total

Overall Weight: 1.02 kg (2.25 lbs)

Furring Channel

Material: Steel furring channel (see Products Under Test)

Dimensions: 7 @ 2463.8 mm (97 in.) long by 69 mm (2.72 in.) wide

Formed Depth: 22.2 mm (0.875 in.) Steel Thickness: 0.49 mm (0.019 in.)

Installation: Clipped in to isolating clips, oriented perpendicular to concrete slab

Overall Weight: 6.58 kg (14.5 lbs)

Mass per Unit Length: 0.38 kg/m (0.26 lbs/ft)



® RIVERBANK ACOUSTICAL LABORATORIES IS ACCREDITED BY NVLAP (LAB CODE 100227-0) FOR ACOUSTICAL TESTING SERVICES IN ACCORDANCE WITH ISO/IEC 17025:2017 AND FOR THIS PROCEDURE. THIS REPORT MUST NOT BE USED BY THE CLIENT TO CLAIM PRODUCT CERTIFICATION, APPROVAL, OR ENDORSEMENT BY RAL, NVLAP, NIST, OR ANY AGENCY OF THE U.S. GOVERNMENT.

1512 S BATAVIA AVENUE GENEVA, IL 60134

An A L I O N Technical Center

RIVERBANK.ALIONSCIENCE.COM FOUNDED 1918 BY WALLACE CLEMENT SABINE

630-232-0104

Test Report

RALTM-IN21-010 Page 3 of 14

ClarkDietrich 2021-01-27

Ceiling Assembly (continued)

Insulation

Material: R-6.7 unfaced fiberglass insulation

Dimensions: 406 mm (16 in.) wide by 1219 mm (48 in.) long pieces

Thickness: 51 mm (2 in.)

Installation: Draped over furring channel

Orientation: Length of pieces perpendicular to furring channel

Overall Weight: 4.31 kg (9.5 lbs)

Density: $8.78 \text{ kg/m}^3 (0.55 \text{ lbs/ft}^3)$

Gypsum Layer 1

Material: Type X gypsum board

Manufacturer: USG

Brand name: Sheetrock® brand, Firecode® core (type X)

1219 mm (48 in.) wide by 2616 mm (103 in.) long Dimensions:

> 1219 mm (48 in.) wide by 2584.5 mm (101.75 in.) long 1219 mm (48 in.) wide by 1384 mm (54.5 in.) long 1219 mm (48 in.) wide by 1346 mm (53 in.) long

Thickness: 15.9 mm (0.625 in.)

Installation: Fastened to furring channel at center flange

Fasteners: Type S bugle head drywall screws @ 31.8 mm (1.25 in.)

Fastener Spacing: 610 mm (24 in.) on center

Overall Weight: 105.23 kg (232 lbs) Mass per Unit Area: $10.88 \text{ kg/m}^2 (2.23 \text{ lbs/ft}^2)$

Note: Joints and screw heads on the exposed face of the gypsum board in the receive room were treated with a thin bead of acoustical sealant and metal tape (0.23 kg (0.5 lbs) total).

Flooring

Vinyl flooring planks, interlocking edge design Material:

Dimensions: 2438 mm (96 in.) by 4267 mm (168 in.) as installed

Plank width @ 220 mm (8.7 in.)

Thickness: 7 mm (0.276 in.)

Installation: Planks joined at edges, loose laid over concrete slab

Plank lengths varied to facilitate staggered joints

Overall Weight: 83.69 kg (184.5 lbs) Mass per Unit Area: $8.04 \text{ kg/m}^2 (1.65 \text{ lbs/ft}^2)$



® RIVERBANK ACOUSTICAL LABORATORIES IS ACCREDITED BY NVLAP (LAB CODE 100227-0) FOR ACOUSTICAL TESTING SERVICES IN ACCORDANCE WITH ISO/IEC 17025:2017 AND FOR THIS PROCEDURE. THIS REPORT MUST NOT BE USED BY THE CLIENT TO CLAIM PRODUCT CERTIFICATION, APPROVAL, OR ENDORSEMENT BY RAL, NVLAP, NIST, OR ANY AGENCY OF THE U.S. GOVERNMENT.

1512 S BATAVIA AVENUE GENEVA, IL 60134 630-232-0104 An ALION Technical Center

RIVERBANK.ALIONSCIENCE.COM FOUNDED 1918 BY WALLACE CLEMENT SABINE

Test Report

ClarkDietrich 2021-01-27

RALTM-IN21-010 Page 4 of 14

Overall Specimen Measurements

Dimensions: 2.44 m (96.0 in) wide by 4.27 m (168 in.) long

Thickness: 264 mm (10.375 in.)

Weight: 5224.13 kg (11517.25 lbs)

Overall Area: $10.405 \text{ m}^2 (112 \text{ ft}^2)$

Mass per Unit Area: 502.07 kg/m² (102.83 lbs/ft²)

Test Aperture

Opening Size: 4.27 m (14.0 ft) x 6.10 m (20.0 ft)

Filler Wall: Yes

Aperture Size: 2.44 m (96.0 in) wide by 3.86 m (152.0 in) long

Transmission Area: 9.414 m² (101.33 ft²)

Sealed: Entire periphery (both sides) with dense mastic

Test Environment

Source Room

Volume: 130.84 m³

Temperature: $21.4 \,^{\circ}\text{C} \pm 0.6 \,^{\circ}\text{C}$ Relative Humidity: $50.0 \,\% \pm 0.0 \,\%$

Receive Room

Volume: 82.07 m³

Temperature: $21.9 \,^{\circ}\text{C} \pm 0.6 \,^{\circ}\text{C}$ Relative Humidity: $49.0 \,^{\circ}\text{M} \pm 0.0 \,^{\circ}\text{M}$

Requirements

Temperature: 22° C +/- 5° C, not more than 3° C change over all tests. Relative Humidity: $\geq 30\%$ RH; not more than +/- 3% change over all tests.



® RIVERBANK ACOUSTICAL LABORATORIES IS ACCREDITED BY NVLAP (LAB CODE 100227-0) FOR ACOUSTICAL TESTING SERVICES IN ACCORDANCE WITH ISO/IEC 17025:2017 AND FOR THIS PROCEDURE. THIS REPORT MUST NOT BE USED BY THE CLIENT TO CLAIM PRODUCT CERTIFICATION, APPROVAL, OR ENDORSEMENT BY RAL, NVLAP, NIST, OR ANY AGENCY OF THE U.S. GOVERNMENT.

1512 S BATAVIA AVENUE GENEVA, IL 60134 630-232-0104 An A L I O N Technical Center

Test Report

RIVERBANK.ALIONSCIENCE.COM FOUNDED 1918 BY WALLACE CLEMENT SABINE

Page 5 of 14

ClarkDietrich 2021-01-27



Figure 1 – Specimen mounted in test opening, as viewed from source room



Figure 2 – Specimen mounted in test opening, as viewed from receive room



® RIVERBANK ACOUSTICAL LABORATORIES IS ACCREDITED BY NVLAP (LAB CODE 100227-0) FOR ACOUSTICAL TESTING SERVICES IN ACCORDANCE WITH ISO/IEC 17025:2017 AND FOR THIS PROCEDURE. THIS REPORT MUST NOT BE USED BY THE CLIENT TO CLAIM PRODUCT CERTIFICATION, APPROVAL, OR ENDORSEMENT BY RAL, NVLAP, NIST, OR ANY AGENCY OF THE U.S. GOVERNMENT.

1512 S BATAVIA AVENUE GENEVA, IL 60134 630-232-0104 An A L I O N Technical Center

Test Report

RIVERBANK.ALIONSCIENCE.COM FOUNDED 1918 BY WALLACE CLEMENT SABINE

Page 6 of 14

ClarkDietrich 2021-01-27



Figure 3 – Concrete slabs prior to installation of flooring, viewed from source room

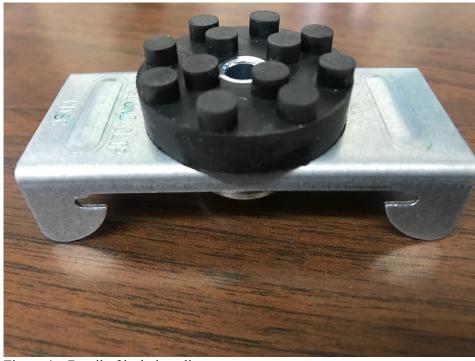


Figure 4 – Detail of isolating clip



® RIVERBANK ACOUSTICAL LABORATORIES IS ACCREDITED BY NVLAP (LAB CODE 100227-0) FOR ACOUSTICAL TESTING SERVICES IN ACCORDANCE WITH ISO/IEC 17025:2017 AND FOR THIS PROCEDURE. THIS REPORT MUST NOT BE USED BY THE CLIENT TO CLAIM PRODUCT CERTIFICATION, APPROVAL, OR ENDORSEMENT BY RAL, NVLAP, NIST, OR ANY AGENCY OF THE U.S. GOVERNMENT.

1512 S BATAVIA AVENUE GENEVA, IL 60134 630-232-0104 An A L I O N Technical Center

Test Report

RIVERBANK.ALIONSCIENCE.COM FOUNDED 1918 BY WALLACE CLEMENT SABINE

Page 7 of 14

ClarkDietrich 2021-01-27



Figure 5 – Detail of isolating clip



Figure 6 – Isolating clips installed to bottom of concrete slabs



® RIVERBANK ACOUSTICAL LABORATORIES IS ACCREDITED BY NVLAP (LAB CODE 100227-0) FOR ACOUSTICAL TESTING SERVICES IN ACCORDANCE WITH ISO/IEC 17025:2017 AND FOR THIS PROCEDURE. THIS REPORT MUST NOT BE USED BY THE CLIENT TO CLAIM PRODUCT CERTIFICATION, APPROVAL, OR ENDORSEMENT BY RAL, NVLAP, NIST, OR ANY AGENCY OF THE U.S. GOVERNMENT.

1512 S BATAVIA AVENUE GENEVA, IL 60134 630-232-0104 An A L I O N Technical Center

Test Report

RIVERBANK.ALIONSCIENCE.COM FOUNDED 1918 BY WALLACE CLEMENT SABINE

Page 8 of 14

ClarkDietrich 2021-01-27



Figure 7 – Furring channel being installed to isolating clips



Figure 8 – Furring channel and insulation installed below slabs



® RIVERBANK ACOUSTICAL LABORATORIES IS ACCREDITED BY NVLAP (LAB CODE 100227-0) FOR ACOUSTICAL TESTING SERVICES IN ACCORDANCE WITH ISO/IEC 17025:2017 AND FOR THIS PROCEDURE. THIS REPORT MUST NOT BE USED BY THE CLIENT TO CLAIM PRODUCT CERTIFICATION, APPROVAL, OR ENDORSEMENT BY RAL, NVLAP, NIST, OR ANY AGENCY OF THE U.S. GOVERNMENT.

1512 S BATAVIA AVENUE GENEVA, IL 60134 630-232-0104 An A L I O N Technical Center

Test Report

RIVERBANK.ALIONSCIENCE.COM FOUNDED 1918 BY WALLACE CLEMENT SABINE

RALTM-IN21-010
Page 9 of 14

ClarkDietrich 2021-01-27



Figure 9 – Gypsum board partially installed to furring channel



® RIVERBANK ACOUSTICAL LABORATORIES IS ACCREDITED BY NVLAP (LAB CODE 100227-0) FOR ACOUSTICAL TESTING SERVICES IN ACCORDANCE WITH ISO/IEC 17025:2017 AND FOR THIS PROCEDURE. THIS REPORT MUST NOT BE USED BY THE CLIENT TO CLAIM PRODUCT CERTIFICATION, APPROVAL, OR ENDORSEMENT BY RAL, NVLAP, NIST, OR ANY AGENCY OF THE U.S. GOVERNMENT.

1512 S BATAVIA AVENUE GENEVA, IL 60134 630-232-0104 An ALION Technical Center

RIVERBANK.ALIONSCIENCE.COM
FOUNDED 1918 BY
WALLACE CLEMENT SABINE

Test Report

RALTM-IN21-010

Page 10 of 14

ClarkDietrich 2021-01-27

TEST RESULTS

The averaged sound pressure levels, normalized to a receive room reference absorption of 10 m², are tabulated at the sixteen standard frequencies. A graphic presentation of the data and additional information appear on the following pages. The 95% confidence interval for the sound pressure level in the receive room is below the limits specified in Section A1.4 of ASTM E492-09.

FREQ.	<u>Ln</u>	ΔL_n	<u>DEV</u>		FREQ.	<u>Ln</u>	$\underline{\Delta L_n}$	<u>DEV</u>
				_				
100	59	2.54	8		800	25	6.61	0
125	50	2.73	0		1000	22 *	6.64	0
160	49	4.09	0		1250	15 *	5.68	0
200	45	2.99	0		1600	10 **	3.54	0
250	51	1.95	0		2000	10 **	4.11	0
315	43	3.77	0		2500	8 **	5.93	0
400	39	5.22	0		3150	6 **	1.25	0
500	33	4.24	0					
630	28	5.34	0					

IIC=61

ABBREVIATION INDEX

FREQ. = FREQUENCY, HERTZ, (cps)

Ln = NORMALIZED SOUND PRESSURE LEVEL, dB

 $\Delta L_n = 95\%$ UNCERTAINTY LIMIT FOR Ln, dB

DEV. = DEVIATION FROM SHIFTED IIC CONTOUR, dB (SUM OF DEV = 8)

IIC = IMPACT INSULATION CLASS

* = LEVEL CORRECTED DUE TO BACKGROUND NOISE PER E492 SEC 10.2.2

** = LEVEL CORRECTED DUE TO BACKGROUND NOISE PER E492 SEC 10.2.3

Tested by

Dean Victor

Lead Experimentalist

Report by

Malcolm Kelly

Test Engineer, Acoustician

Approved by

Eric P. Wolfram

Laboratory Manager

TESTING

NVLAP LAB CODE 100227-0

® RIVERBANK ACOUSTICAL LABORATORIES IS ACCREDITED BY NVLAP (LAB CODE 100227-0) FOR ACOUSTICAL TESTING SERVICES IN ACCORDANCE WITH ISO/IEC 17025:2017 AND FOR THIS PROCEDURE. THIS REPORT MUST NOT BE USED BY THE CLIENT TO CLAIM PRODUCT CERTIFICATION, APPROVAL, OR ENDORSEMENT BY RAL, NVLAP, NIST, OR ANY AGENCY OF THE U.S. GOVERNMENT.

1512 S BATAVIA AVENUE GENEVA, IL 60134 630-232-0104 An A L I O N Technical Center

RIVERBANK.ALIONSCIENCE.COM FOUNDED 1918 BY WALLACE CLEMENT SABINE


Test Report

RALTM-IN21-010
Page 11 of 14

ClarkDietrich 2021-01-27

IMPACT SOUND TRANSMISSION REPORT

8-Inch Concrete Slab with vinyl plank flooring, insulated single-layer gypsum board ceiling on ClarkDietrich Sound Clips™ (CDSC)

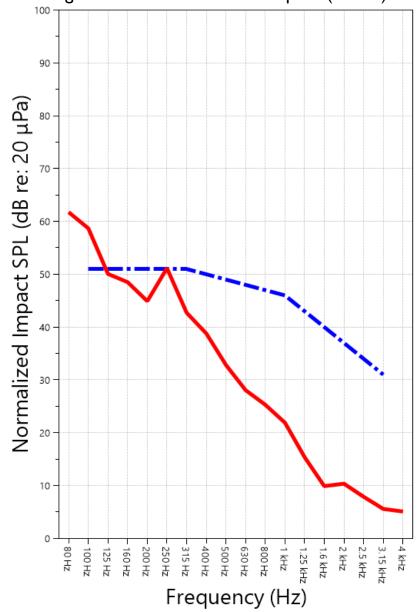

IIC=61

IMPACT SOUND PRESSURE LEVEL
 IMPACT INSULATION CLASS CONTOUR



® RIVERBANK ACOUSTICAL LABORATORIES IS ACCREDITED BY NVLAP (LAB CODE 100227-0) FOR ACOUSTICAL TESTING SERVICES IN ACCORDANCE WITH ISO/IEC 17025:2017 AND FOR THIS PROCEDURE. THIS REPORT MUST NOT BE USED BY THE CLIENT TO CLAIM PRODUCT CERTIFICATION, APPROVAL, OR ENDORSEMENT BY RAL, NVLAP, NIST, OR ANY AGENCY OF THE U.S. GOVERNMENT.

1512 S BATAVIA AVENUE GENEVA, IL 60134 630-232-0104 An A L I O N Technical Center

RIVERBANK.ALIONSCIENCE.COM
FOUNDED 1918 BY
WALLACE CLEMENT SABINE

Test Report

RALTM-IN21-010
Page 12 of 14

ClarkDietrich 2021-01-27

APPENDIX A: Extended Frequency Range Data

Specimen: 8-Inch Concrete Slab with vinyl plank flooring, insulated single-layer gypsum board ceiling on ClarkDietrich Sound ClipsTM (CDSC) (See Full Report)

The following non-accredited data were obtained in accordance with ASTM E989-06 (2012), but extend beyond the defined frequency range of 100 Hz to 3,150 Hz. These unofficial results are representative of the RAL test environment only and intended for research & comparison purposes.

1/3 Octave Band Center Frequency (Hz)	L _n (dB)	ΔL _n (dB)	Repeatability (dB)
31.5	59	10.71	4.45
40	56	3.15	3.47
50	57	3.70	2.55
63	61	3.15	5.07
80	62	5.05	2.23
100	59	2.54	3.47
125	50	2.73	2.85
160	49	4.09	2.46
200	45	2.99	1.93
250	51	1.95	0.73
315	43	3.77	0.79
400	39	5.22	2.17
500	33	4.24	1.93
630	28	5.34	0.21
800	25	6.61	1.41
1000	22 *	6.64	2.05
1250	15 *	5.68	1.49
1600	10 **	3.54	2.22
2000	10 **	4.11	2.51
2500	8 **	5.93	1.26
3150	6 **	1.25	1.51
4000	5 **	0.56	1.85
5000	7 **	0.66	1.82
6300	7 **	0.81	1.90
8000	8 **	1.03	0.88
10000	11 **	1.62	4.02
12500	9 **	1.88	5.26

^{*} Level corrected due to proximity to background noise per E492 Section 10.2.2

TESTING

NVLAP LAB CODE 100227-0

® RIVERBANK ACOUSTICAL LABORATORIES IS ACCREDITED BY NVLAP (LAB CODE 100227-0) FOR ACOUSTICAL TESTING SERVICES IN ACCORDANCE WITH ISO/IEC 17025:2017 AND FOR THIS PROCEDURE. THIS REPORT MUST NOT BE USED BY THE CLIENT TO CLAIM PRODUCT CERTIFICATION, APPROVAL, OR ENDORSEMENT BY RAL, NVLAP, NIST, OR ANY AGENCY OF THE U.S. GOVERNMENT.

^{**} Level corrected due to proximity to background noise per E492 Section 10.2.3, represents lower limit of specimen performance

1512 S BATAVIA AVENUE GENEVA, IL 60134 630-232-0104 An A L I O N Technical Center

RIVERBANK.ALIONSCIENCE.COM
FOUNDED 1918 BY
WALLACE CLEMENT SABINE

Test Report

RALTM-IN21-010
Page 13 of 14

ClarkDietrich 2021-01-27

APPENDIX B: Glossary for Variability Metrics

Specimen: 8-Inch Concrete Slab with vinyl plank flooring, insulated single-layer gypsum board ceiling on ClarkDietrich Sound ClipsTM (CDSC) (See Full Report)

ΔL_n, the 95% confidence interval for the reported normalized sound pressure level, is calculated from the standard deviation of the set of sound pressure levels measured during this individual test. This metric is calculated in an effort to quantify the variability in measured levels due to the combined influences of varying sound pressure level in the receive room and changes in specimen response for different tapping machine locations.

Repeatability, expressed as a 95% confidence interval, is calculated from the standard deviation in normalized sound pressure level as obtained from a total of six consecutive tests conducted according to this test method by RAL from 2019-02-07 to 2019-02-12. The tests were performed on a specimen composed of 152.4 mm (6 in.) thick concrete slabs, which was left installed and unaltered between tests. This metric provides an estimate of the variation in results that might be observed if the test were repeated with no change to the installed specimen. Note that repeatability will vary with the construction type.

1512 S BATAVIA AVENUE GENEVA, IL 60134 630-232-0104 An A L I O N Technical Center

RIVERBANK.ALIONSCIENCE.COM
FOUNDED 1918 BY
WALLACE CLEMENT SABINE

Page 14 of 14

630-232-0104 Test Report

RALTM-IN21-010

ClarkDietrich 2021-01-27

APPENDIX C: Instruments of Traceability

Specimen: 8-Inch Concrete Slab with vinyl plank flooring, insulated single-layer gypsum board ceiling on ClarkDietrich Sound ClipsTM (CDSC) (See Full Report)

		Serial	Date of	Calibration
Description	Model	Number	Certification	<u>Due</u>
System 2	Type 3160-A-042	3160- 106974	2020-08-13	2021-08-13
Bruel & Kjaer Mic And Preamp C	Type 4943-B-001	2311439	2020-04-07	2021-04-07
Bruel & Kjaer Tapping Machine	Type 3207	3151105	2020-10-27	2021-10-27
Bruel & Kjaer Pistonphone	Type 4228	2781248	2020-08-12	2021-08-12
EXTECH Hygro 662	SD700	A083662	2020-12-18	2021-12-18
EXTECH Hygro 663	SD700	A083663	2020-12-18	2021-12-18

APPENDIX D: Revisions to Original Test Report

Specimen: 8-Inch Concrete Slab with vinyl plank flooring, insulated single-layer gypsum board ceiling on ClarkDietrich Sound ClipsTM (CDSC) (See Full Report)

<u>Date</u>2021-02-12

Revision

Original report issued

END





Riverbank Acoustical Laboratories 1512 S. Batavia Ave. Geneva, IL 60134-3302

Tel: 630-232-0104 Fax: 630-232-0138

Email: RAL@alionscience.com

SPONSOR: ClarkDietrich

West Chester, OH

CONDUCTED: 2021-01-27

Report Referenced: RALTM-IN21-010

Page 1 of 1

ON: 8-Inch Concrete Slab with vinyl plank flooring, insulated single-layer gypsum board ceiling on

ClarkDietrich Sound Clips™ (CDSC) (See Full Test Report for Details)

Nonstandard Appendix E to ASTM E492-09 Impact Transmission Report

Current priorities in the architectural acoustics community involve the development of more nuanced impact insulation metrics. Acoustics consultants and end users have observed that assemblies with equal Impact Insulation Class (IIC) ratings can sound substantially different and prompt differing amounts of customer complaints. Impact insulation metrics that are newly standardized or still in development seek to quantify the performance of floor-ceiling assemblies within certain ranges of sound frequency. These metrics would ideally correlate more strongly to subjective user experience and predict how the nature of the impact source will affect the response of the floor-ceiling construction.

Standard Classification ASTM E3222-20a provides a method for calculating the **High-Frequency Impact Insulation Class (HIIC)**, using normalized impact sound pressure level (L_n) data at frequency bands from 400 Hz to 3150 Hz. In multi-family housing, high-frequency impact sound correlates to common sources such as the impacts of hard-heeled shoes, dragging furniture, dog toenails, and objects dropped on hard-surfaced flooring.

Methods for parametrizing insulation of low-frequency impact sound are still under deliberation; no calculation method has yet been standardized. A preliminary proposed method for calculating the **Low-Frequency Impact Insulation Class (LHC)** uses normalized impact sound pressure level (L_n) data at frequency bands from 50 Hz to 80 Hz. Low-frequency impact noise correlates to the "thudding" of footfalls on lightweight structures. Refer to the ASTM Work Item referenced below for details.

A summary of impact insulation ratings for the specimen described in the referenced test report is given below.

Referenced Document	Rating	Calculated Value
Standard Classification ASTM E989-18	IIC	61
Standard Classification ASTM E3222-20a	HIIC	83
Nonstandard Work Item ASTM WK63897	LIIC	60

Prepared by

Keith Kimberling

Associate Test Engineer, Acoustician