


Heavy Duty Joist and Truss Hangers

CDAGUS universal face-mount hanger is designed for wood plate trusses and heavily loaded members. 4" and 5" seat dimension provides greatest bearing area of any hanger available. Super capacity design loads are the highest of any universal face-mounted hanger. Larger header flange and joist seat make this hanger very easy to install with common nails.

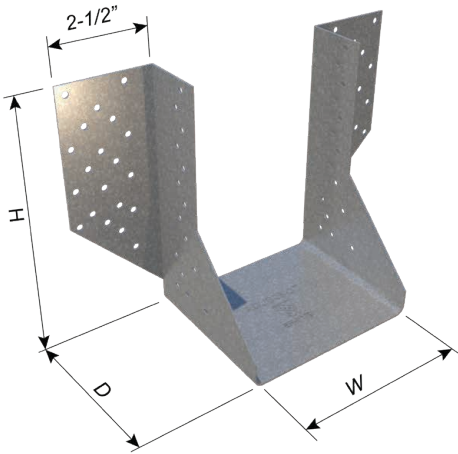

MATERIAL SPECIFICATIONS


- Gauge: 12ga (97mil)
- Design Thickness: 0.1017 inches
- Coating: G90 (Z275) hot-dipped galvanized coating
- Yield Strength: Structural Grade 50 Type H (ST50H), 50ksi (340 MPa)

PRODUCT DIMENSIONS

- JOIST AND TRUSS SIZES: 2xs, double 2xs, triple 2xs
- SCL (LVL) SIZES: Available for 2-3/4" and 7-1/4" widths
- GLULAM SIZES: Available for 3-1/8" and 5-1/8" widths

CODE REPORT

- IAPMO ER-0179

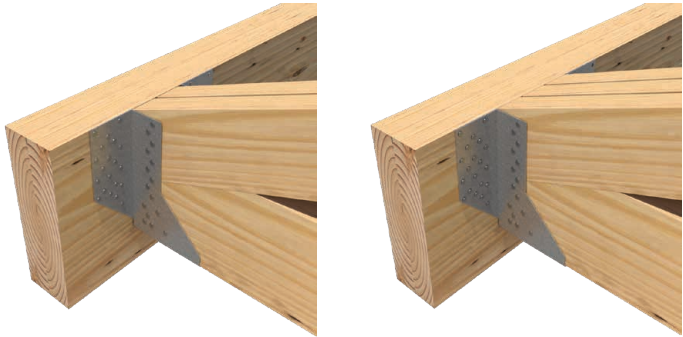

CDAGUS28-2T Installation      CDAGUS28-3T Installation

Heavy Duty Joist and Truss Hangers (CDAGUS)

Spruce Pine-Fir (0.42 Specific Gravity)																
Product Code	Supported Member	Hanger Dimension (in)			Common Nail Type Fasteners				Allowable Downward Loads				Allowable Upward Loads			
		Clear Width	Overall Height	Overall Depth	Joist Size	Joist Qty.	Header Size	Header Qty.	Load Duration Factor				Load Duration Factor			
									1.00	1.15	1.25	1.60	1.00	1.15	1.25	1.60
CDAGUS26-2T	3	3.4375	5.4375	4.25	0.148" x 3.0"	24	0.162" x 3.5"	30	4125	4740	4760	4760	2700	2700	2700	2700
CDAGUS28-2T	3	3.4375	6.9375	4.25	0.148" x 3.0"	30	0.162" x 3.5"	40	5500	6325	6875	7410	3485	3485	3485	3485
CDAGUS28-3T	4.5	5	6.9375	4.25	0.148" x 3.0"	30	0.162" x 3.5"	40	5500	6325	6875	7410	3485	3485	3485	3485

Douglas Fir-Larch (0.50 Specific Gravity)																
Product Code	Supported Member	Hanger Dimension (in)			Common Nail Type Fasteners				Allowable Downward Loads				Allowable Upward Loads			
		Clear Width	Overall Height	Overall Depth	Joist Size	Joist Qty.	Header Size	Header Qty.	Load Duration Factor				Load Duration Factor			
									1.00	1.15	1.25	1.60	1.00	1.15	1.25	1.60
CDAGUS26-2T	3	3.4375	5.4375	4.25	0.148" x 3.0"	24	0.162" x 3.5"	30	4760	4760	4760	4760	2700	2700	2700	2700
CDAGUS28-2T	3	3.4375	6.9375	4.25	0.148" x 3.0"	30	0.162" x 3.5"	40	6365	7320	7410	7410	3485	3485	3485	3485
CDAGUS28-3T	4.5	5	6.9375	4.25	0.148" x 3.0"	30	0.162" x 3.5"	40	6365	7320	7410	7410	3485	3485	3485	3485

Southern Pine (0.55 Specific Gravity)																
Product Code	Supported Member	Hanger Dimension (in)			Common Nail Type Fasteners				Allowable Downward Loads				Allowable Upward Loads			
		Clear Width	Overall Height	Overall Depth	Joist Size	Joist Qty.	Header Size	Header Qty.	Load Duration Factor				Load Duration Factor			
									1.00	1.15	1.25	1.60	1.00	1.15	1.25	1.60
CDAGUS26-2T	3	3.4375	5.4375	4.25	0.148" x 3.0"	24	0.162" x 3.5"	30	4760	4760	4760	4760	2700	2700	2700	2700
CDAGUS28-2T	3	3.4375	6.9375	4.25	0.148" x 3.0"	30	0.162" x 3.5"	40	6875	7410	7410	7410	3485	3485	3485	3485
CDAGUS28-3T	4.5	5	6.9375	4.25	0.148" x 3.0"	30	0.162" x 3.5"	40	6875	7410	7410	7410	3485	3485	3485	3485

Notes:

- 1 For SI units: 1 inch = 25.4 mm, 1 pound (lb) = 4.4 N
- 2 Allowable load capacities are based on specie and load duration factor as permitted by applicable building code.